

## FEATURES:

- Pin-out compatible with standard '125 Logic products
- $5\Omega$  A/B bi-directional bus switch
- Isolation under power-off conditions
- Over-voltage tolerant
- Latch-up performance exceeds 100mA
- $V_{CC} = 2.3V - 3.6V$ , Normal Range
- ESD > 2000V per MIL-STD-883, Method 3015;  
> 200V using machine model (C = 200pF, R = 0)
- Available in QSOP and TSSOP packages

## APPLICATIONS:


- 3.3V High Speed Bus Switching and Bus Isolation

## DESCRIPTION:


The CBTLV3125 features four independent switches. Each switch is enabled when the associated output-enable ( $\overline{OE}$ ) input is low.

To ensure the high-impedance state during power up or power down,  $\overline{OE}$  should be tied to  $V_{CC}$  through a pullup resistor; the minimum value of the resistor is determined by the current-sinking capability of the driver.

## FUNCTIONAL BLOCK DIAGRAM

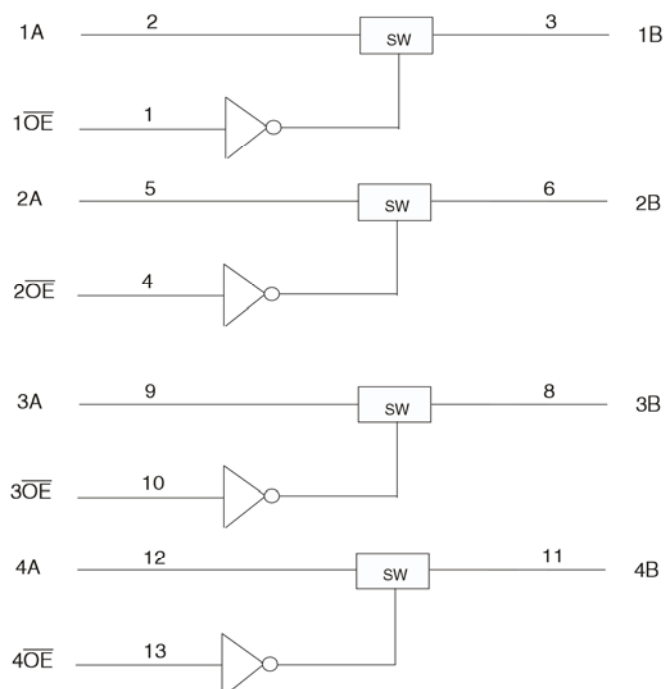

## SIMPLIFIED SCHEMATIC, EACH SWITCH

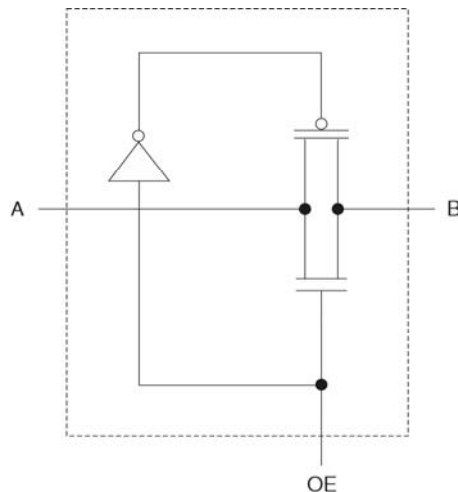

### NOTE:


1. Pin numbers shown apply to the 14-pin TSSOP package.

The IDT logo is a registered trademark of Integrated Device Technology, Inc.


INDUSTRIAL TEMPERATURE RANGE

DECEMBER 2014

## PIN CONFIGURATION

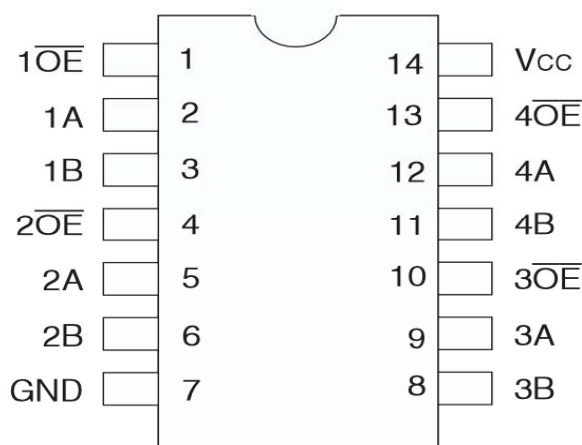

TSSOP  
TOP VIEW

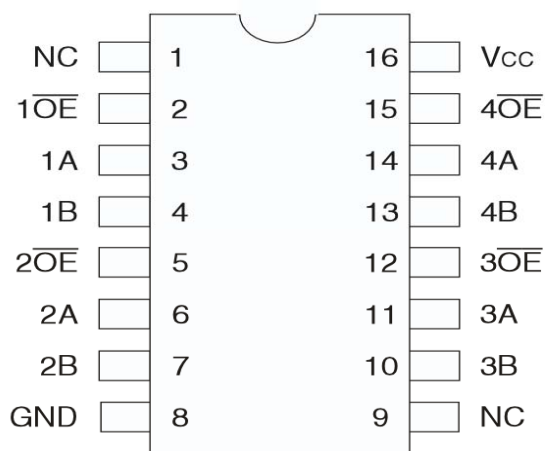

QSOP  
TOP VIEW

## ABSOLUTE MAXIMUM RATINGS<sup>(1)</sup>

| Symbol           | Description                               | Max          | Unit |
|------------------|-------------------------------------------|--------------|------|
| V <sub>CC</sub>  | Supply Voltage Range                      | −0.5 to +4.6 | V    |
| V <sub>I</sub>   | Input Voltage Range                       | −0.5 to +4.6 | V    |
|                  | Continuous Channel Current                | 128          | mA   |
| I <sub>IK</sub>  | Input Clamp Current, V <sub>I/O</sub> < 0 | −50          | mA   |
| T <sub>STG</sub> | Storage Temperature                       | −65 to +150  | °C   |

NOTE:

- Stresses greater than those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

## FUNCTION TABLE<sup>(1)</sup>

| Input $\overline{OE}$ | Inputs/Outputs  |
|-----------------------|-----------------|
| L                     | A Port = B Port |
| H                     | Disconnect      |

NOTE:

- H = HIGH Voltage Level  
L = LOW Voltage Level

## OPERATING CHARACTERISTICS, T<sub>A</sub> = 25°C<sup>(1)</sup>

| Symbol          | Parameter                        | Test Conditions                | Min. | Max. | Unit |
|-----------------|----------------------------------|--------------------------------|------|------|------|
| V <sub>CC</sub> | Supply Voltage                   |                                | 2.3  | 3.6  | V    |
| V <sub>IH</sub> | High-Level Control Input Voltage | V <sub>CC</sub> = 2.3V to 2.7V | 1.7  | —    | V    |
|                 |                                  | V <sub>CC</sub> = 2.7V to 3.6V | 2    | —    |      |
| V <sub>IL</sub> | Low-Level Control Input Voltage  | V <sub>CC</sub> = 2.3V to 2.7V | —    | 0.7  | V    |
|                 |                                  | V <sub>CC</sub> = 2.7V to 3.6V | —    | 0.8  |      |
| T <sub>A</sub>  | Operating Free-Air Temperature   |                                | −40  | 85   | °C   |

NOTE:

- All unused control inputs of the device must be held at V<sub>CC</sub> or GND to ensure proper device operation.

## DC ELECTRICAL CHARACTERISTICS OVER OPERATING RANGE

Following Conditions Apply Unless Otherwise Specified:

Operating Conditions:  $T_A = -40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$

| Symbol                | Parameter                                                | Test Conditions                                                                     |                     | Min. | Typ. <sup>(1)</sup> | Max.    | Unit          |
|-----------------------|----------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------|------|---------------------|---------|---------------|
| $V_{IK}$              | Control Inputs, Data Inputs                              | $V_{CC} = 3\text{V}$ , $I_I = -18\text{mA}$                                         |                     | —    | —                   | -1.2    | V             |
| $I_I$                 | Control Inputs                                           | $V_{CC} = 3.6\text{V}$ , $V_I = V_{CC}$ or GND                                      |                     | —    | —                   | $\pm 1$ | $\mu\text{A}$ |
| $I_{OZ}$              | Data I/O                                                 | $V_{CC} = 3.6\text{V}$ , $V_O = 0$ or $3.6\text{V}$ , switch disabled               |                     | —    | —                   | 5       | $\mu\text{A}$ |
| $I_{OFF}$             |                                                          | $V_{CC} = 0$ , $V_I$ or $V_O = 0$ to $3.6\text{V}$                                  |                     | —    | —                   | 50      | $\mu\text{A}$ |
| $I_{CC}$              |                                                          | $V_{CC} = 3.6\text{V}$ , $I_O = 0$ , $V_I = V_{CC}$ or GND                          |                     | —    | —                   | 10      | $\mu\text{A}$ |
| $\Delta I_{CC}^{(2)}$ | Control Inputs                                           | $V_{CC} = 3.6\text{V}$ , one input at $3\text{V}$ , other inputs at $V_{CC}$ or GND |                     | —    | —                   | 300     | $\mu\text{A}$ |
| $C_I$                 | Control Inputs                                           | $V_I = 3\text{V}$ or $0$                                                            |                     | —    | 4                   | —       | pF            |
| $C_{IO(OFF)}$         |                                                          | $V_O = 3\text{V}$ or $0$ , $\overline{OE} = V_{CC}$                                 |                     | —    | 6                   | —       | pF            |
| $R_{ON}^{(3)}$        | $V_{CC} = 2.3\text{V}$<br>Typ. at $V_{CC} = 2.5\text{V}$ | $V_I = 0$                                                                           | $I_O = 64\text{mA}$ | —    | 5                   | 8       | $\Omega$      |
|                       |                                                          |                                                                                     | $I_O = 24\text{mA}$ | —    | 5                   | 8       |               |
|                       | $V_{CC} = 3\text{V}$                                     | $V_I = 1.7\text{V}$                                                                 | $I_O = 15\text{mA}$ | —    | 27                  | 40      |               |
|                       |                                                          |                                                                                     | $I_O = 64\text{mA}$ | —    | 5                   | 7       |               |
|                       |                                                          |                                                                                     | $I_O = 24\text{mA}$ | —    | 5                   | 7       |               |
|                       |                                                          |                                                                                     | $I_O = 15\text{mA}$ | —    | 10                  | 15      |               |

### NOTES:

1. Typical values are at  $V_{CC} = 3.3\text{V}$ ,  $+25^{\circ}\text{C}$  ambient.
2. The increase in supply current is attributable to each current that is at the specified voltage level rather than  $V_{CC}$  or GND.
3. This is measured by the voltage drop between the A and B terminals at the indicated current through the switch.

## SWITCHING CHARACTERISTICS

| Symbol         | Parameter                                        | $V_{CC} = 2.5\text{V} \pm 0.2\text{V}$ |      | $V_{CC} = 3.3\text{V} \pm 0.3\text{V}$ |      | Unit |
|----------------|--------------------------------------------------|----------------------------------------|------|----------------------------------------|------|------|
|                |                                                  | Min.                                   | Max. | Min.                                   | Max. |      |
| $t_{PD}^{(1)}$ | Propagation Delay<br>A to B or B to A            | —                                      | 0.15 | —                                      | 0.25 | ns   |
| $t_{EN}$       | Output Enable Time<br>$\overline{OE}$ to A or B  | 1                                      | 4.6  | 1                                      | 4.4  | ns   |
| $t_{DIS}$      | Output Disable Time<br>$\overline{OE}$ to A or B | 1                                      | 3.9  | 1                                      | 4.2  | ns   |


### NOTE:

1. The propagation delay is the calculated RC time constant of the typical on-state resistance of the switch and the specified load capacitance driven by an ideal voltage source (zero output impedance).

## TEST CIRCUITS AND WAVEFORMS

### TEST CONDITIONS

| Symbol     | $V_{CC}^{(1)} = 3.3V \pm 0.3V$ | $V_{CC}^{(2)} = 2.5V \pm 0.2V$ | Unit |
|------------|--------------------------------|--------------------------------|------|
| $V_{LOAD}$ | 6                              | $2 \times V_{CC}$              | V    |
| $V_{IH}$   | 3                              | $V_{CC}$                       | V    |
| $V_T$      | 1.5                            | $V_{CC} / 2$                   | V    |
| $V_{LZ}$   | 300                            | 150                            | mV   |
| $V_{HZ}$   | 300                            | 150                            | mV   |
| $C_L$      | 50                             | 30                             | pF   |

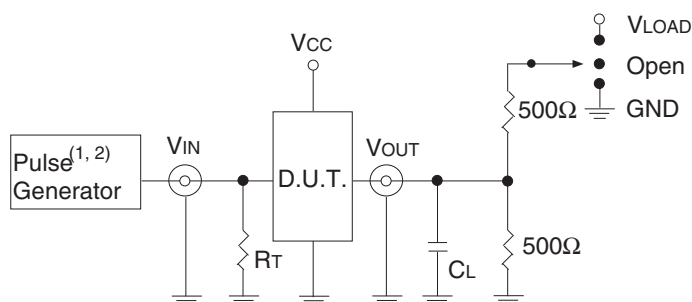

Test Circuits for All Outputs

#### DEFINITIONS:

$C_L$  = Load capacitance: includes jig and probe capacitance.


$R_T$  = Termination resistance: should be equal to  $Z_{OUT}$  of the Pulse Generator.

#### NOTES:


1. Pulse Generator for All Pulses: Rate  $\leq 10\text{MHz}$ ;  $t_r \leq 2.5\text{ns}$ ;  $t_f \leq 2.5\text{ns}$ .
2. Pulse Generator for All Pulses: Rate  $\leq 10\text{MHz}$ ;  $t_r \leq 2\text{ns}$ ;  $t_f \leq 2.5\text{ns}$ .

### SWITCH POSITION

| Test              | Switch     |
|-------------------|------------|
| $t_{PLZ}/t_{PZL}$ | $V_{LOAD}$ |
| $t_{PHZ}/t_{PZH}$ | GND        |
| $t_D$             | Open       |

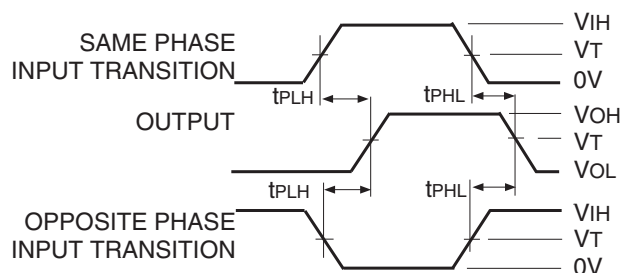

Propagation Delay

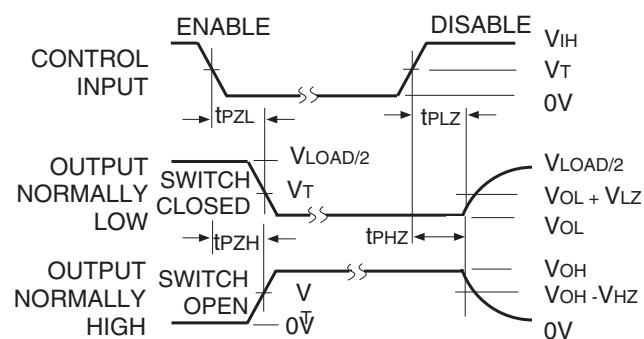

Enable and Disable Times

ORDERING INFORMATION

| <u>XX</u>   | CBTLV | <u>XXX</u>  | <u>XX</u> | <u>X</u> |                                            |
|-------------|-------|-------------|-----------|----------|--------------------------------------------|
| Temp. Range |       | Device Type | Package   |          |                                            |
|             |       |             |           | Blank    | Tube or Tray                               |
|             |       |             |           | 8        | Tape and Reel                              |
|             |       |             |           | QG       | Quarter-size Small Outline Package - Green |
|             |       |             |           | PGG      | Thin Shrink Small Outline Package - Green  |
|             |       |             |           | 3125     | Low-Voltage Quadruple Bus Switch           |
|             |       |             |           | 74       | −40°C to +85°C                             |

## IMPORTANT NOTICE AND DISCLAIMER

RENESAS ELECTRONICS CORPORATION AND ITS SUBSIDIARIES ("RENESAS") PROVIDES TECHNICAL SPECIFICATIONS AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for developers skilled in the art designing with Renesas products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. Renesas grants you permission to use these resources only for development of an application that uses Renesas products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Renesas intellectual property or to any third party intellectual property. Renesas disclaims responsibility for, and you will fully indemnify Renesas and its representatives against, any claims, damages, costs, losses, or liabilities arising out of your use of these resources. Renesas' products are provided only subject to Renesas' Terms and Conditions of Sale or other applicable terms agreed to in writing. No use of any Renesas resources expands or otherwise alters any applicable warranties or warranty disclaimers for these products.

(Rev.1.0 Mar 2020)

### Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,  
Koto-ku, Tokyo 135-0061, Japan  
[www.renesas.com](http://www.renesas.com)

### Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit:  
[www.renesas.com/contact/](http://www.renesas.com/contact/)

### Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.