




# HEX BUFFER/DRIVER GATED ENABLE NONINVERTING AND INVERTING, 3-STATE

CONNECTION DIAGRAM

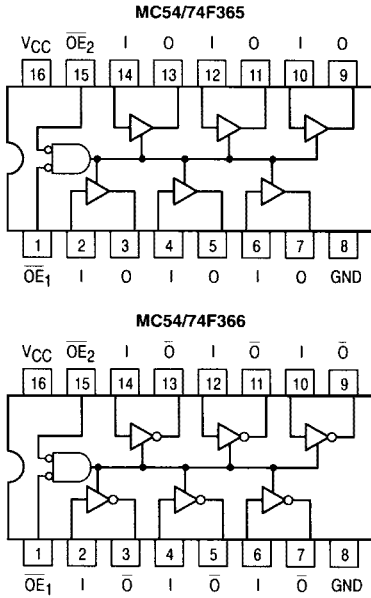

FUNCTION TABLE

Inputs		Outputs		
$\overline{OE}_1$	$\overline{OE}_2$	I	O	$\overline{O}$
L	L	L	L	H
L	L	H	H	L
X	H	X	Z	Z
H	X	X	Z	Z

H = HIGH Voltage Level  
L = LOW Voltage Level  
X = Don't Care  
Z = High Impedance


GUARANTEED OPERATING RANGES

Symbol	Parameter		Min	Typ	Max	Unit
$V_{CC}$	Supply Voltage	54,74	4.5	5.0	5.5	V
$T_A$	Operating Ambient Temperature Range	54	-55	25	125	°C
		74	0	25	70	
$I_{OH}$	Output Current — High	54			-12	mA
		74			-15	
$I_{OL}$	Output Current — Low	54			48	mA
		74			64	


**MC54/74F365**  
**MC54/74F366**

**F365**  
**HEX BUFFER/DRIVER**  
**GATED ENABLE**  
**NONINVERTING, 3-STATE**


**F366**  
**HEX BUFFER/DRIVER**  
**GATED ENABLE**  
**INVERTING, 3-STATE**  
**FAST™ SCHOTTKY TTL**



**J SUFFIX**  
CERAMIC  
CASE 620-09



**N SUFFIX**  
PLASTIC  
CASE 648-08



**D SUFFIX**  
SOIC  
CASE 751B-03

**ORDERING INFORMATION**

MC54FXXXJ Ceramic  
MC74FXXXN Plastic  
MC74FXXXD SOIC

# MC54/74F365 • MC54/74F366

## DC CHARACTERISTICS OVER OPERATING TRMPERATURE RANGE (unless otherwise specified)

Symbol	Parameter	Limits			Unit	Test Conditions		
		Min	Typ	Max				
V <sub>IH</sub>	Input HIGH Voltage	2.0			V	Guaranteed Input HIGH Voltage		
V <sub>IL</sub>	Input LOW Voltage			0.8	V	Guaranteed Input LOW Voltage		
V <sub>IK</sub>	Input Clamp Diode Voltage			-1.2	V	I <sub>IN</sub> = -18 mA	V <sub>CC</sub> = MIN	
V <sub>OH</sub>	Output HIGH Voltage	54,74	2.4	3.4	V	I <sub>OH</sub> = -3.0 mA	V <sub>CC</sub> = 4.5 V	
		74	2.7	3.4	V	I <sub>OH</sub> = -3.0 mA	V <sub>CC</sub> = 4.75 V	
		54	2.0		V	I <sub>OH</sub> = -12 mA	V <sub>CC</sub> = 4.5 V	
		74	2.0		V	I <sub>OH</sub> = -15 mA	V <sub>CC</sub> = 4.5 V	
V <sub>OL</sub>	Output LOW Voltage	54		0.35	0.55	V	I <sub>OL</sub> = 48 mA	V <sub>CC</sub> = MAX
		74		0.4	0.55	V	I <sub>OL</sub> = 64 mA	
I <sub>OZH</sub>	Output OFF Current-HIGH			50	μA	V <sub>OUT</sub> = 2.7 V	V <sub>CC</sub> = MAX	
I <sub>OZL</sub>	Output OFF Current-LOW			-50	μA	V <sub>OUT</sub> = 0.5 V	V <sub>CC</sub> = MAX	
I <sub>IH</sub>	Input HIGH Current			20	μA	V <sub>IN</sub> = 2.7 V	V <sub>CC</sub> = MAX	
				100	μA	V <sub>IN</sub> = 7.0 V	V <sub>CC</sub> = 0 V	
I <sub>IL</sub>	Input LOW Current			-20	μA	V <sub>IN</sub> = 0.5 V	V <sub>CC</sub> = MAX	
I <sub>OS</sub>	Output Short Circuit Current (Note 2)	-100		-225	mA	V <sub>OUT</sub> = GND	V <sub>CC</sub> = MAX	
I <sub>CC</sub>	F365	I <sub>CCH</sub>		35	mA	V <sub>CC</sub> = MAX		
		I <sub>CCL</sub>		62				
		I <sub>CCZ</sub>		48				
	F366	I <sub>CCH</sub>		25				
		I <sub>CCL</sub>		62				
		I <sub>CCZ</sub>		48				

**NOTES:**

- For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions for the applicable device type.
- Not more than one output should be shorted at a time, nor for more than 1 second.

## AC CHARACTERISTICS

Symbol	Parameter	54/74F			54F		74F		Unit		
		T <sub>A</sub> = +25°C			T <sub>A</sub> = -55°C to +125°C		T <sub>A</sub> = 0°C to +70°C				
		Min	Typ	Max	Min	Max	Min	Max			
t <sub>PLH</sub>	Propagation Delay	F365		2.0	4.5	6.5	2.0	8.0	2.0	7.0	ns
t <sub>PHL</sub>	I <sub>n</sub> to O <sub>n</sub>	3.0	5.5	7.0	3.0	8.5	3.0	7.5			
t <sub>PLH</sub>	Propagation Delay	F366		2.0	5.0	6.5	2.0	8.5	2.0	7.5	ns
t <sub>PHL</sub>	I <sub>n</sub> to O <sub>n</sub>	1.0	3.0	5.0	1.0	6.5	1.0	5.5			
t <sub>PZH</sub>	Output Enable Time	3.0	6.5	9.5	3.0	11	3.0	10	ns		
t <sub>PZL</sub>	to HIGH and LOW Level	4.0	6.0	9.0	4.0	10.5	4.0	9.5			
t <sub>PHZ</sub>	Output Disable Time	2.5	4.5	6.5	2.5	8.0	2.5	7.0	ns		
t <sub>PLZ</sub>	from HIGH and LOW Level	1.5	4.0	6.0	1.5	7.5	1.5	6.5			