

### Recommended Application:

Peripheral Clock for Intel Servers with Wake-On-Lan support

### Output Features:

- 1 - 0.7V current-mode differential CPU output
- 6 - 50MHz RMII outputs
- 2 - 125MHz RGMII outputs
- 1 - 0.7V current-mode differential DOT 96MHz output
- 1 - 33.33MHz output
- 1 - 32.768KHz output
- 2 - 25MHz REF outputs


### Key Specifications:

- Exact synthesis on CPU, RGMII, RMII & 33.33MHz clocks
- +/- 100ppm frequency accuracy on other clocks

### Features/Benefits:

- Selectable SMBus Address - D0/D1 or C0/C1
- Spread Spectrum capability on CPU and DOT 96MHz clocks
- SMBus Control:
  - M/N and spread programming on CPU and DOT 96MHz clocks via SMBus
  - Differential outputs can be disabled via pins or SMBus

### Pin Configuration

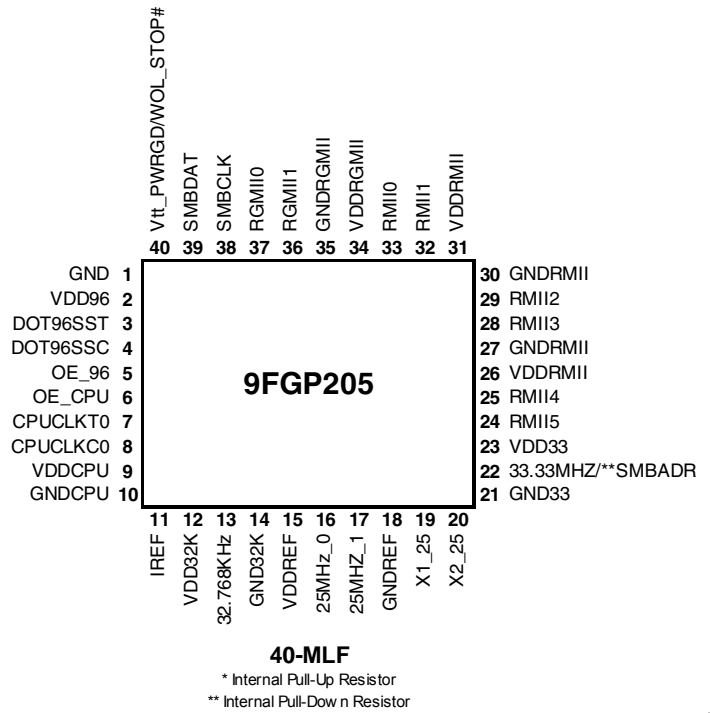

### Functionality

| CPU FS2    | CPU FS1    | CPU FS0    | CPUCLK   | DOT96SS | 33.33 | RMII  | RGMII  | 25    | 32.768 |
|------------|------------|------------|----------|---------|-------|-------|--------|-------|--------|
| Byte0 Bit2 | Byte0 Bit1 | Byte0 Bit0 | MHz      | MHz     | MHz   | MHz   | MHz    | MHz   | KHz    |
| 0          | 0          | 0          | 266.67   | 96.00   | 33.33 | 50.00 | 125.00 | 25.00 | 32.768 |
| 0          | 0          | 1          | 133.33   | 96.00   | 33.33 | 50.00 | 125.00 | 25.00 | 32.768 |
| 0          | 1          | 0          | 200.00   | 96.00   | 33.33 | 50.00 | 125.00 | 25.00 | 32.768 |
| 0          | 1          | 1          | 166.67   | 96.00   | 33.33 | 50.00 | 125.00 | 25.00 | 32.768 |
| 1          | 0          | 0          | 333.33   | 96.00   | 33.33 | 50.00 | 125.00 | 25.00 | 32.768 |
| 1          | 0          | 1          | 100.00   | 96.00   | 33.33 | 50.00 | 125.00 | 25.00 | 32.768 |
| 1          | 1          | 0          | 400.00   | 96.00   | 33.33 | 50.00 | 125.00 | 25.00 | 32.768 |
| 1          | 1          | 1          | Reserved | 96.00   | 33.33 | 50.00 | 125.00 | 25.00 | 32.768 |

Power up default is highlighted.

### SMBus Address Selection

| SMBADR     |            |
|------------|------------|
| SMBADR = 0 | SMBADR = 1 |
| D0/D1      | C0/C1      |


## Pin Description

| PIN # | PIN NAME          | PIN TYPE | DESCRIPTION   |
|-------|-------------------|----------|---|
| 1     | GND               | PWR      | Ground pin.   |
| 2     | VDD96             | PWR      | Power pin for the DOT96 clocks, nominal 3.3V  |
| 3     | DOT96SST          | OUT      | True clock of differential pair for 96.00MHz spread spectrum capable DOT clock. These are current mode outputs. External resistors are required for voltage bias.   |
| 4     | DOT96SSC          | OUT      | Complementary clock of differential pair for 96.00MHz spread spectrum capable DOT clock. These are current mode outputs. External resistors are required for voltage bias.  |
| 5     | OE_96             | IN       | Active high input for enabling 96Hz outputs.<br>1 = enable output(s), 0 = tri-state output(s)   |
| 6     | OE_CPU            | IN       | Active high input for enabling CPU DIFF pairs.<br>1 = enable output(s), 0 = tri-state output(s)   |
| 7     | CPUCLKT0          | OUT      | True clock of differential pair CPU outputs. These are current mode outputs. External resistors are required for voltage bias.  |
| 8     | CPUCLKC0          | OUT      | Complementary clock of differential pair CPU outputs. These are current mode outputs. External resistors are required for voltage bias.   |
| 9     | VDDCPU            | PWR      | Supply for CPU clocks, 3.3V nominal   |
| 10    | GNDCPU            | PWR      | Ground pin for the CPU outputs  |
| 11    | IREF              | OUT      | This pin establishes the reference current for the differential current-mode output pairs. This pin requires a fixed precision resistor tied to ground in order to establish the appropriate current. 475 ohms is the standard value. |
| 12    | VDD32K            | PWR      | Power pin for the 32.768KHz outputs, nominal 3.3V   |
| 13    | 32.768KHz         | OUT      | 32.768KHz clock output  |
| 14    | GND32K            | PWR      | Ground pin for the 32.768KHz outputs  |
| 15    | VDDREF            | PWR      | Ref, XTAL power supply, nominal 3.3V  |
| 16    | 25MHz_0           | OUT      | 25MHz clock output, 3.3V  |
| 17    | 25MHz_1           | OUT      | 25MHz clock output, 3.3V  |
| 18    | GNDREF            | PWR      | Ground pin for the REF outputs.   |
| 19    | X1_25             | IN       | Crystal input, Nominally 25.00MHz.  |
| 20    | X2_25             | OUT      | Crystal output, Nominally 25.00MHz.   |
| 21    | GND33             | PWR      | Ground pin for the 33.33MHz outputs   |
| 22    | 33.33MHz/**SMBADR | I/O      | 33.33MHz clock output / SMBus address select bit.   |
| 23    | VDD33             | PWR      | Power pin for the 33.33MHz outputs, nominal 3.3V  |
| 24    | RMII5             | OUT      | 3.3V 50MHz RMII clock output  |
| 25    | RMII4             | OUT      | 3.3V 50MHz RMII clock output  |
| 26    | VDDRMII           | PWR      | 3.3V power pin for the RMII clocks.   |
| 27    | GNDRMII           | PWR      | Ground pin for the RMII outputs   |
| 28    | RMII3             | OUT      | 3.3V 50MHz RMII clock output  |
| 29    | RMII2             | OUT      | 3.3V 50MHz RMII clock output  |
| 30    | GNDRMII           | PWR      | Ground pin for the RMII outputs   |
| 31    | VDDRMII           | PWR      | 3.3V power pin for the RMII clocks.   |
| 32    | RMII1             | OUT      | 3.3V 50MHz RMII clock output  |
| 33    | RMII0             | OUT      | 3.3V 50MHz RMII clock output  |
| 34    | VDDRGMII          | PWR      | 3.3V power pin for the RGMII clocks and PLL   |
| 35    | GNDRGMII          | PWR      | Ground pin for the RGMII outputs  |
| 36    | RGMII1            | OUT      | 3.3V 125MHz RGMII clock output  |
| 37    | RGMII0            | OUT      | 3.3V 125MHz RGMII clock output  |
| 38    | SMBCLK            | IN       | Clock pin of SMBUS circuitry, 5V tolerant   |
| 39    | SMBDAT            | I/O      | Data pin of SMBUS circuitry, 5V tolerant  |
| 40    | CKPWRGD_WOL_STOP# | IN       | Notifies clock to sample latched inputs on first low to high transition. After first power up, a low stops all outputs except those designated to run in power down mode (WOL_STOP# mode)   |

## General Description

The **9FGP205** is a peripheral clock for Intel Servers. It is driven with a 25MHz crystal and generates a variety of clocks, including 125MHz RGMII. An SMBus interface allows full control of the device.


## Block Diagram

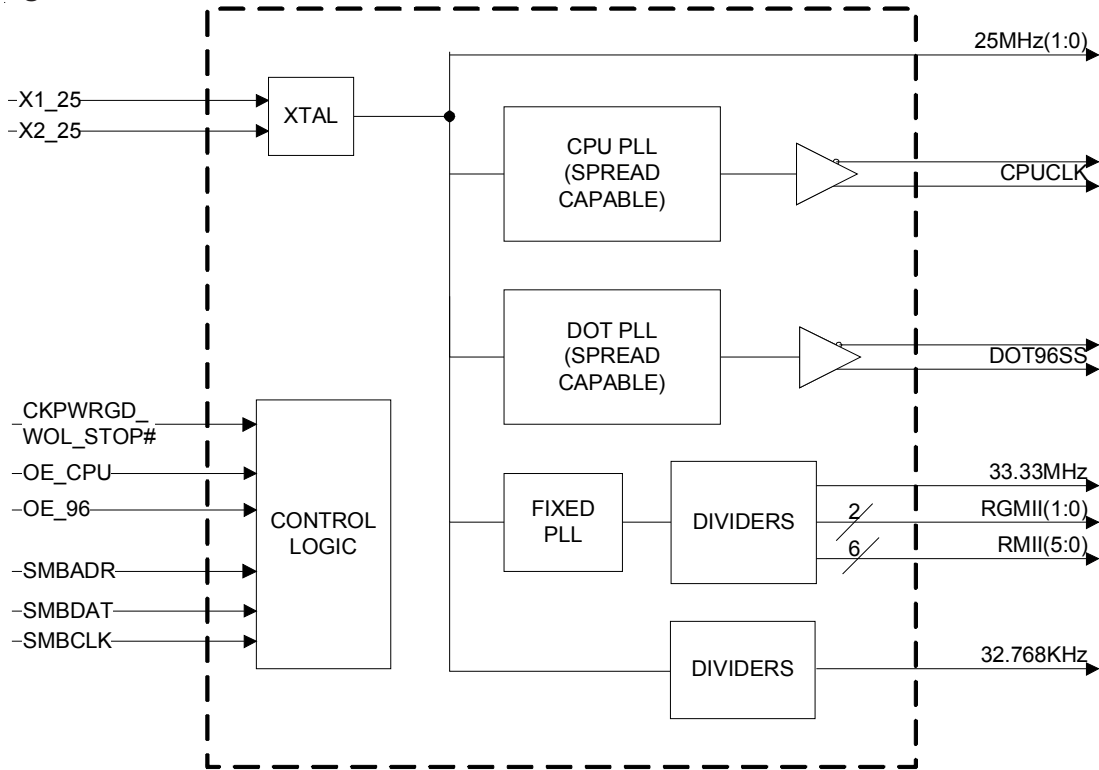

## Power Supply Pins

| Pin Number |       | Description                   |
|------------|-------|-------------------------------|
| VDD        | GND   |                               |
| 9          | 10    | CPUCLK output and PLL         |
| 2          | 1     | DOT96SS output and PLL        |
| 34         | 35    | 125 MHz RGMII outputs and PLL |
| 26,31      | 27,30 | 50 MHz RMII outputs           |
| 23         | 21    | 33.33MHz output               |
| 12         | 14    | 32.768KHz output              |
| 15         | 18    | XTAL, REF outputs             |

Note: All VDD should be connected to a common power rail with proper filtering and decoupling. Pins 2, 9 and 34 should be treated as analog pins for decoupling purposes.

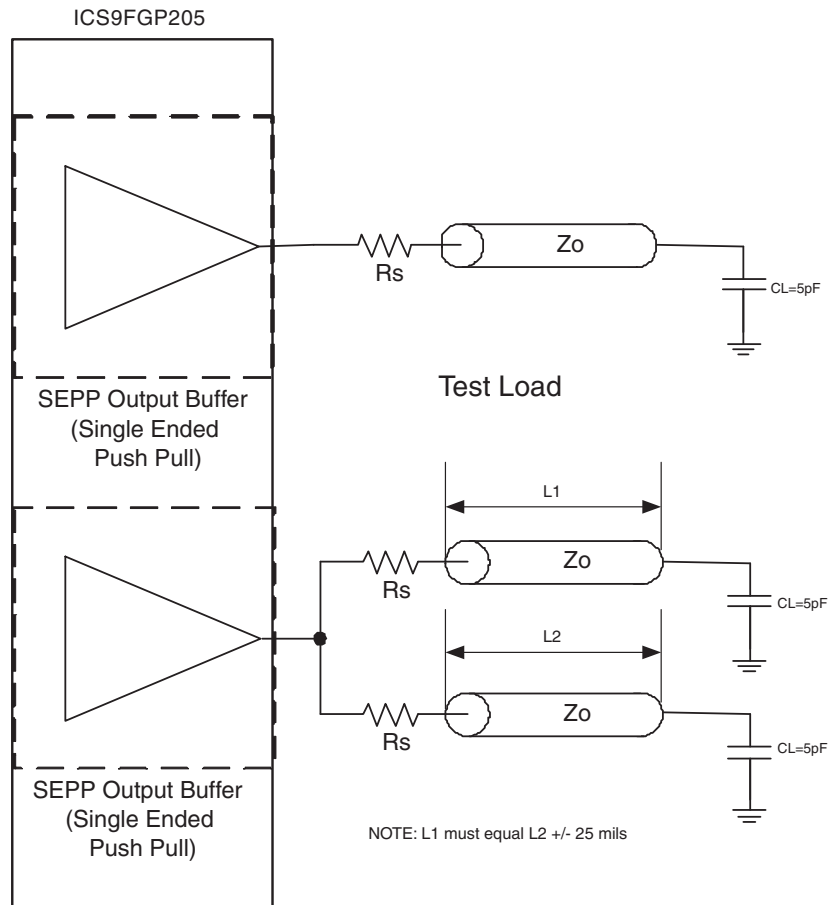

Drive Strength for all the single-ended outputs can be controlled by the SMBus Bytes 4 and 5 as shown in the Default Drive Strength Table.

**Default Drive Strength Table**

|           | Default Drive | Optional Drive |
|-----------|---------------|----------------|
| RGMI      | 1 Load        | NA             |
| RMI       | 1 Load        | 2 Loads        |
| 33.33MHz  | 2 Loads       | 1 Load         |
| 25Mhz     | 2 Loads       | 1 Load         |
| 32.768KHz | 2 Loads       | 1 Load         |

**Series Termination Resistor Values EXCEPT RGMI**

| Output Drive Strength | Series Resistor (Rs) for driving 1 Load | Series Resistor (Rs) for driving 2 Loads |
|-----------------------|---|--|
| 1 Load                | 22 ohms                                 | N/A                                      |
| 2 Loads               | 33 ohms                                 | 8.2 ohms                                 |

Note: All values are for Zo = 50Ω

**Series Termination Resistor Values - RGMI**

| Output Drive Strength | Series Resistor (Rs) for driving 1 Load | Series Resistor (Rs) for driving 2 Loads |
|-----------------------|---|--|
| 1 Load                | 27 ohms                                 | N/A                                      |

Note: All values are for Zo = 50Ω

**Truth Table1: CKPWRGD\_WOL\_STOP#, OE\_96 and OE\_CPU**

| CKPWRGD_WOL_STOP# | OE_96 | DOT96SSC | OE_CPU | CPUCLK   |
|-------------------|-------|----------|--------|----------|
| 0                 | X     | X        | X      | X        |
| 0                 |       |          |        |          |
| 1                 | 0     | Disabled | 0      | Disabled |
| 1                 | 1     | Enabled  | 1      | Enabled  |

\*Assuming DOT96 Output Enable from SMBus Byte2 Bit0 sets to enable (default)

\*Assuming CPUCLK Output Enable from SMBus Byte2 Bit1 sets to enable (default)

**Truth Table 2: CKPWRGD\_WOL\_STOP# Single-ended outputs**

| CKPWRGD_WOL_STOP# | Pin 16, 29,<br>32, 33 | Pin 22  | Other<br>outputs |
|-------------------|-----------------------|---------|------------------|
| 0                 | Running               | Hi-Z    | Low              |
| 1                 | Running               | Running | Running          |

\*Assuming SMBus at default value.

**Table: CPU Spread and Frequency Selection**

| CPU<br>SS_EN    | CPU<br>FS2      | CPU<br>FS1      | CPU<br>FS0      | CPU<br>MHz | Down<br>Spread % |
|-----------------|-----------------|-----------------|-----------------|------------|------------------|
| Byte 0<br>Bit 3 | Byte 0<br>Bit 2 | Byte 0<br>Bit 1 | Byte 0<br>Bit 0 |            |                  |
| 0               | 0               | 0               | 0               | 266.67     | 0%               |
| 0               | 0               | 0               | 1               | 133.33     | 0%               |
| 0               | 0               | 1               | 0               | 200.00     | 0%               |
| 0               | 0               | 1               | 1               | 166.67     | 0%               |
| 0               | 1               | 0               | 0               | 333.33     | 0%               |
| 0               | 1               | 0               | 1               | 100.00     | 0%               |
| 0               | 1               | 1               | 0               | 400.00     | 0%               |
| 0               | 1               | 1               | 1               | 200.00     | 0%               |
| 1               | 0               | 0               | 0               | 266.67     | 0.5%             |
| 1               | 0               | 0               | 1               | 133.33     | 0.5%             |
| 1               | 0               | 1               | 0               | 200.00     | 0.5%             |
| 1               | 0               | 1               | 1               | 166.67     | 0.5%             |
| 1               | 1               | 0               | 0               | 333.33     | 0.5%             |
| 1               | 1               | 0               | 1               | 100.00     | 0.5%             |
| 1               | 1               | 1               | 0               | 400.00     | 0.5%             |
| 1               | 1               | 1               | 1               | 200.00     | 0.5%             |

Table: DOT96 Spread and Frequency Selection Table

| DOT96<br>SS_EN  | FS3             | FS2             | FS1             | FS0             | DOT96SS<br>MHz | Spread % |        |
|-----------------|-----------------|-----------------|-----------------|-----------------|----------------|----------|--------|
| Byte 0<br>bit 4 | Byte 3<br>bit 3 | Byte 3<br>bit 2 | Byte 3<br>bit 1 | Byte 3<br>bit 0 |                |          |        |
| 0               | 0               | 0               | 0               | 0               | 96.00          | 0        |        |
| 0               | 0               | 0               | 0               | 1               | 96.00          | 0        |        |
| 0               | 0               | 0               | 1               | 0               | 96.00          | 0        |        |
| 0               | 0               | 0               | 1               | 1               | 96.00          | 0        |        |
| 0               | 0               | 1               | 0               | 0               | 96.00          | 0        |        |
| 0               | 0               | 1               | 0               | 1               | 96.00          | 0        |        |
| 0               | 0               | 1               | 1               | 0               | 96.00          | 0        |        |
| 0               | 0               | 1               | 1               | 1               | 96.00          | 0        |        |
| 0               | 1               | 0               | 0               | 0               | 96.00          | 0        |        |
| 0               | 1               | 0               | 0               | 1               | 96.00          | 0        |        |
| 0               | 1               | 0               | 1               | 0               | 96.00          | 0        |        |
| 0               | 1               | 0               | 1               | 1               | 96.00          | 0        |        |
| 0               | 1               | 1               | 0               | 0               | 96.00          | 0        |        |
| 0               | 1               | 1               | 0               | 1               | 96.00          | 0        |        |
| 0               | 1               | 1               | 1               | 0               | 96.00          | 0        |        |
| 0               | 1               | 1               | 1               | 1               | 96.00          | 0        |        |
| 1               | 0               | 0               | 0               | 0               | 96.00          | +/-0.25  | Center |
| 1               | 0               | 0               | 0               | 1               | 96.00          | +/-0.5   | Center |
| 1               | 0               | 0               | 1               | 0               | 96.00          | +/-0.75  | Center |
| 1               | 0               | 0               | 1               | 1               | 96.00          | +/-1.0   | Center |
| 1               | 0               | 1               | 0               | 0               | 96.00          | -0.25    | Down   |
| 1               | 0               | 1               | 0               | 1               | 96.00          | -0.50    | Down   |
| 1               | 0               | 1               | 1               | 0               | 96.00          | -0.75    | Down   |
| 1               | 0               | 1               | 1               | 1               | 96.00          | -1.0     | Down   |
| 1               | 1               | 0               | 0               | 0               | 96.00          | -1.25    | Down   |
| 1               | 1               | 0               | 0               | 1               | 96.00          | -1.50    | Down   |
| 1               | 1               | 0               | 1               | 0               | 96.00          | -1.75    | Down   |
| 1               | 1               | 0               | 1               | 1               | 96.00          | -2.0     | Down   |
| 1               | 1               | 1               | 0               | 0               | 96.00          | -2.25    | Down   |
| 1               | 1               | 1               | 0               | 1               | 96.00          | -2.5     | Down   |
| 1               | 1               | 1               | 1               | 0               | 96.00          | -2.75    | Down   |
| 1               | 1               | 1               | 1               | 1               | 96.00          | -3.00    | Down   |

**Absolute Maximum Ratings**

| PARAMETER                              | SYMBOL   | CONDITIONS | MIN       | TYP  | MAX       | UNITS | Notes |
|--|----------|------------|-----------|------|-----------|-------|-------|
| 3.3V Supply Voltage                    | VDDxxx   | -          | GND - 0.5 | 3.3V | GND + 4.5 | V     | 1     |
| Maximum difference across all VDD pins | VDDdelta | -          |           |      | 0.5       | V     | 1     |
| Storage Temperature                    | Ts       | -          | -65       |      | 150       | °C    | 1     |
| Ambient Operating Temp                 | Tambient | -          | 0         |      | 70        | °C    | 1     |
| Junction Temperature                   | Tj       | -          |           |      | 125       | °C    | 1     |
| Input ESD protection HBM               | ESD prot | -          | 2000      |      |           | V     | 1     |

<sup>1</sup>Guaranteed by design and characterization, not 100% tested in production.

**Electrical Characteristics - Input/Supply/Common Output Parameters**

| PARAMETER                                  | SYMBOL               | CONDITIONS*  | MIN                   | TYP   | MAX                   | UNITS | Notes |
|--|----------------------|--|-----------------------|-------|-----------------------|-------|-------|
| Input High Voltage                         | V <sub>IH</sub>      | 3.3 V +/-5%  | 1.8                   |       | V <sub>DD</sub> + 0.3 | V     | 1     |
| Input Low Voltage                          | V <sub>IL</sub>      | 3.3 V +/-5%  | V <sub>SS</sub> - 0.3 |       | 1.4                   | V     | 1     |
| Input High Current                         | I <sub>IH</sub>      | V <sub>IN</sub> = V <sub>DD</sub>                            | -5                    |       | 5                     | uA    | 1     |
| Input Low Current                          | I <sub>IL1</sub>     | V <sub>IN</sub> = 0 V; Inputs with no pull-up resistors      | -5                    |       |                       | uA    | 1     |
|  | I <sub>IL2</sub>     | V <sub>IN</sub> = 0 V; Inputs with pull-up resistors         | -200                  |       |                       | uA    | 1     |
| Low Threshold Input-High Voltage           | V <sub>IH_FS</sub>   | 3.3 V +/-5%  | 0.7                   |       | V <sub>DD</sub> + 0.3 | V     | 1     |
| Low Threshold Input-Low Voltage            | V <sub>IL_FS</sub>   | 3.3 V +/-5%  | V <sub>SS</sub> - 0.3 |       | 0.35                  | V     | 1     |
| Operating Current                          | I <sub>DD3.3OP</sub> | all outputs driven, CPU@100M                                 |                       |       | 225                   | mA    | 1     |
| Powerdown Current                          | I <sub>DD3.3PD</sub> | WOL_STOP mode (default)                                      |                       |       | 75                    | mA    | 1     |
|  |                      | all diff pairs driven  |                       |       | 30                    | mA    | 1     |
|  |                      | all differential pairs tri-stated                            |                       |       | 8                     | mA    | 1     |
| Input Frequency                            | F <sub>i</sub>       | V <sub>DD</sub> = 3.3 V                                      |                       | 25.00 |                       | MHz   | 2     |
| Pin Inductance                             | L <sub>pin</sub>     |  |                       |       | 7                     | nH    | 1     |
| Input Capacitance                          | C <sub>IN</sub>      | Logic Inputs   |                       |       | 4                     | pF    | 1     |
|  | C <sub>OUT</sub>     | Output pin capacitance                                       |                       |       | 5                     | pF    | 1     |
|  | C <sub>INX</sub>     | X1 & X2 pins   |                       |       | 5                     | pF    | 1     |
| Clk Stabilization                          | T <sub>STAB</sub>    | From VDD Power-Up or de-assertion of PD to 1st clock         |                       | 0.5   | 2.5                   | ms    | 1     |
| Modulation Frequency                       |                      | Triangular Modulation  | 30                    |       | 33                    | kHz   | 1     |
| Tdrive_PD                                  |                      | CPU output enable after PD de-assertion                      |                       | 260   | 300                   | us    | 1     |
| Tfall_PD                                   |                      | PD fall time of  |                       |       | 5                     | ns    | 1     |
| Trise_PD                                   |                      | PD rise time of  |                       |       | 5                     | ns    | 1     |
| SMBus Voltage                              | V <sub>DD</sub>      |  | 2.7                   |       | 5.5                   | V     | 1     |
| Low-level Output Voltage                   | V <sub>OL</sub>      | @ I <sub>PULLUP</sub>  |                       |       | 0.4                   | V     | 1     |
| Current sinking at V <sub>OL</sub> = 0.4 V | I <sub>PULLUP</sub>  |  | 4                     | 5     |                       | mA    | 1     |
| SCLK/SDATA Clock/Data Rise Time            | T <sub>RI2C</sub>    | (Max V <sub>IL</sub> - 0.15) to (Min V <sub>IH</sub> + 0.15) |                       |       | 1000                  | ns    | 1     |
| SCLK/SDATA Clock/Data Fall Time            | T <sub>FI2C</sub>    | (Min V <sub>IH</sub> + 0.15) to (Max V <sub>IL</sub> - 0.15) |                       |       | 300                   | ns    | 1     |

\*TA = 0 - 70°C; Supply Voltage VDD = 3.3 V +/-5%

<sup>1</sup>Guaranteed by design and characterization, not 100% tested in production.

<sup>2</sup>Input frequency should be measured at the REF pin and tuned to ideal 25.00MHz to meet ppm frequency accuracy on PLL outputs.

## Electrical Characteristics - CPU 0.7V Current Mode Differential Pair

| PARAMETER                       | SYMBOL                  | CONDITIONS*  | MIN     | TYP     | MAX     | UNITS | NOTES |
|---------------------------------|-------------------------|--|---------|---------|---------|-------|-------|
| Current Source Output Impedance | Z <sub>o</sub>          | V <sub>O</sub> = V <sub>x</sub>                          | 3000    |         |         | Ω     | 1     |
| Voltage High                    | V <sub>High</sub>       | Statistical measurement on single ended signal           | 660     | 731     | 850     | mV    | 1,3   |
| Voltage Low                     | V <sub>Low</sub>        |  | -150    | 70      | 150     | mV    | 1,3   |
| Max Voltage                     | V <sub>ovs</sub>        | Measurement on single ended signal using absolute value. |         | 800     | 1150    | mV    | 1     |
| Min Voltage                     | V <sub>uds</sub>        |  | -300    | 8       |         | mV    | 1     |
| Crossing Voltage (abs)          | V <sub>x(abs)</sub>     |  | 250     | 366     | 550     | mV    | 1     |
| Crossing Voltage (var)          | d-V <sub>x</sub>        | Variation of crossing over all edges                     |         | 16      | 140     | mV    | 1     |
| Long Accuracy                   | ppm                     | see T <sub>period</sub> min-max values                   | -100    | 0       | 100     | ppm   | 1,2   |
| Average period                  | T <sub>period</sub>     | 100.00MHz nominal  | 9.9990  | 10.0000 | 10.0001 | ns    | 2     |
|                                 |                         | 100.00MHz spread   | 10.0240 | 10.0250 | 10.0251 | ns    | 2     |
| Absolute min/max period         | T <sub>absmin/max</sub> | 100.00MHz nominal/spread                                 | 9.9490  |         | 10.1011 | ns    | 1,2   |
| Rise Time                       | t <sub>r</sub>          | V <sub>OL</sub> = 0.175V, V <sub>OH</sub> = 0.525V       | 175     | 376     | 700     | ps    | 1,4   |
| Fall Time                       | t <sub>f</sub>          | V <sub>OH</sub> = 0.525V V <sub>OL</sub> = 0.175V        | 175     | 335     | 700     | ps    | 1,4   |
| Rise Time Variation             | d-t <sub>r</sub>        | V <sub>OL</sub> = 0.175V, V <sub>OH</sub> = 0.525V       |         | 104     | 125     | ps    | 1     |
| Fall Time Variation             | d-t <sub>f</sub>        | V <sub>OH</sub> = 0.525V V <sub>OL</sub> = 0.175V        |         | 92      | 125     | ps    | 1     |
| Rise/Fall Matching              | t <sub>RFM</sub>        | Single-ended measurement, averaging on                   |         | 12.7    | 20      | %     | 1     |
| Slew Rate                       | t <sub>SLEW</sub>       | Differential Measurement                                 | 1       | 2       | 4       | V/ns  | 1,5   |
| Duty Cycle                      | d <sub>tb</sub>         | Measurement from differential waveform                   | 45      | 49.8    | 55      | %     | 1     |
| Jitter, Cycle to cycle          | t <sub>jyc-cyc</sub>    | Measurement from differential waveform, CPUCLK           |         | 45      | 50      | ps    | 1     |

\*T<sub>A</sub> = 0 - 70°C; V<sub>DD</sub> = 3.3 V +/-5%; C<sub>L</sub> = 2pF, R<sub>S</sub> = 33.2Ω, R<sub>P</sub> = 49.9Ω, I<sub>REF</sub> = 475Ω

<sup>1</sup>Guaranteed by design and characterization, not 100% tested in production.

<sup>2</sup>All Long Term Accuracy and Clock Period specifications are guaranteed assuming that 25MHz<sub>x</sub> is tuned to exactly 25.000MHz

<sup>3</sup>I<sub>REF</sub> = V<sub>DD</sub>/(3xR<sub>R</sub>). For R<sub>R</sub> = 475Ω (1%), I<sub>REF</sub> = 2.32mA. I<sub>OH</sub> = 6 x I<sub>REF</sub> and V<sub>OH</sub> = 0.7V @ Z<sub>O</sub> = 50Ω.

<sup>4</sup>Rise/fall time measured on single-ended waveform per CK410 specification.

<sup>5</sup>Slew rate measured on differential waveform per CK505 specification.



### Electrical Characteristics - DOT96SS 0.7V Current Mode Differential Pair

| PARAMETER                       | SYMBOL               | CONDITIONS*  | MIN     | TYP     | MAX     | UNITS | Notes |
|---------------------------------|----------------------|--|---------|---------|---------|-------|-------|
| Current Source Output Impedance | Z <sub>o</sub>       | V <sub>O</sub> = V <sub>x</sub>                          | 3000    |         |         | Ω     | 1     |
| Voltage High                    | VHigh                | Statistical measurement on single ended signal           | 660     | 725     | 850     | mV    | 1,3   |
| Voltage Low                     | VLow                 |  | -150    | 51      | 150     | mV    | 1,3   |
| Max Voltage                     | Vovs                 | Measurement on single ended signal using absolute value. |         | 764     | 1150    | mV    | 1     |
| Min Voltage                     | Vuds                 |  | -300    | 5       |         | mV    | 1     |
| Crossing Voltage (abs)          | Vx(abs)              |  | 250     | 372     | 550     | mV    | 1     |
| Crossing Voltage (var)          | d-Vcross             | Variation of crossing over all edges                     |         |         | 140     | mV    | 1     |
| Long Accuracy                   | ppm                  | see Tperiod min-max values                               | -100    | -41     | 100     | ppm   | 1,2   |
| Average period                  | Tperiod              | 96.00MHz nominal   | 10.4156 | 10.4166 | 10.4176 | ns    | 2     |
|                                 |                      | 96.00MHz -0.5% spread                                    | 10.4417 | 10.4427 | 10.4437 | ns    | 2     |
| Absolute min period             | Tabmin               | 96.00MHz nominal/-0.5% spread                            | 10.1917 |         | 10.6937 | ns    | 1,2   |
| Rise Time                       | t <sub>r</sub>       | V <sub>OL</sub> = 0.175V, V <sub>OH</sub> = 0.525V       | 175     | 361     | 700     | ps    | 1,4   |
| Fall Time                       | t <sub>f</sub>       | V <sub>OH</sub> = 0.525V V <sub>OL</sub> = 0.175V        | 175     | 375     | 700     | ps    | 1,4   |
| Rise Time Variation             | d-t <sub>r</sub>     | V <sub>OL</sub> = 0.175V, V <sub>OH</sub> = 0.525V       |         | 107     | 125     | ps    | 1     |
| Fall Time Variation             | d-t <sub>f</sub>     | V <sub>OH</sub> = 0.525V V <sub>OL</sub> = 0.175V        |         | 107     | 125     | ps    | 1     |
| Rise/Fall Matching              | t <sub>RFM</sub>     | Single-ended measurement, averaging on                   |         | 15      | 20      | %     | 1     |
| Slew Rate                       | t <sub>SLEW</sub>    | Differential Measurement                                 | 1       | 2       | 4       | V/ns  | 1,5   |
| Duty Cycle                      | d <sub>13</sub>      | Measurement from differential waveform                   | 45      | 51.3    | 55      | %     | 1     |
| Jitter, Cycle to cycle          | t <sub>jyc-cyc</sub> | Measurement from differential waveform                   |         | 54      | 250     | ps    | 1     |

\*T<sub>A</sub> = 0 - 70°C; V<sub>DD</sub> = 3.3 V +/-5%; C<sub>L</sub> = 2pF, R<sub>S</sub> = 33.2Ω, R<sub>P</sub> = 49.9Ω, I<sub>REF</sub> = 475Ω

<sup>1</sup>Guaranteed by design and characterization, not 100% tested in production.

<sup>2</sup>All Long Term Accuracy and Clock Period specifications are guaranteed assuming that 25MHz\_x is tuned to exactly 25.000MHz

<sup>3</sup>I<sub>REF</sub> = V<sub>DD</sub>/(3xR<sub>R</sub>). For R<sub>R</sub> = 475Ω (1%), I<sub>REF</sub> = 2.32mA. I<sub>OH</sub> = 6 x I<sub>REF</sub> and V<sub>OH</sub> = 0.7V @ Z<sub>O</sub> = 50Ω.

<sup>4</sup>Rise/fall time measured on single-ended waveform per CK410 specification.

<sup>5</sup>Slew rate measured on differential waveform per CK505 specification.

### Electrical Characteristics - REF - 25MHz

| PARAMETER           | SYMBOL               | CONDITIONS                                       | MIN    | TYP    | MAX    | UNITS | Notes |
|---------------------|----------------------|--|--------|--------|--------|-------|-------|
| Long Accuracy       | ppm                  | see Tperiod min-max values                       | -50    | 0      | 50     | ppm   | 1,2   |
| Clock period        | T <sub>period</sub>  | 25.00MHz output nominal                          | 39.998 | 40.000 | 40.002 | ns    | 2     |
| Output High Voltage | V <sub>OH</sub>      | I <sub>OH</sub> = -1 mA                          | 2.4    |        |        | V     | 1     |
| Output Low Voltage  | V <sub>OL</sub>      | I <sub>OL</sub> = 1 mA                           |        |        | 0.4    | V     | 1     |
| Output High Current | I <sub>OH</sub>      | V <sub>OH</sub> @ MIN = 1.0 V                    | -29    |        |        | mA    | 1     |
|                     |                      | V <sub>OH</sub> @ MAX = 3.135 V                  |        |        | -23    | mA    | 1     |
| Output Low Current  | I <sub>OL</sub>      | V <sub>OL</sub> @ MIN = 1.95 V                   | 29     |        |        | mA    | 1     |
|                     |                      | V <sub>OL</sub> @ MAX = 0.4 V                    |        |        | 27     | mA    | 1     |
| Rise Time           | t <sub>r1</sub>      | V <sub>OL</sub> = 0.4 V, V <sub>OH</sub> = 2.4 V | 0.5    | 1.14   | 2      | ns    | 1     |
| Fall Time           | t <sub>f1</sub>      | V <sub>OH</sub> = 2.4 V, V <sub>OL</sub> = 0.4 V | 0.5    | 1.32   | 2      | ns    | 1     |
| Skew                | t <sub>sk1</sub>     | V <sub>T</sub> = 1.5 V                           |        | 16     | 500    | ps    | 1     |
| Duty Cycle          | d <sub>t1</sub>      | V <sub>T</sub> = 1.5 V                           | 45     | 53.2   | 55     | %     | 1     |
| Jitter, Cycle-cycle | t <sub>jyc-cyc</sub> | V <sub>T</sub> = 1.5 V                           |        | 75     | 200    | ps    | 1     |

\*T<sub>A</sub> = 0 - 70°C; Supply Voltage VDD = 3.3 V +/-5%, CL = 5 pF with R<sub>s</sub> as shown in the termination table (unless otherwise specified)

<sup>1</sup>Guaranteed by design and characterization, not 100% tested in production.

<sup>2</sup>All Long Term Accuracy and Clock Period specifications are guaranteed assuming that 25MHz\_x is tuned to exactly 25.000MHz

**Electrical Characteristics - RGMII - 125MHz**

| PARAMETER              | SYMBOL                  | CONDITIONS*  | MIN    | TYP   | MAX    | UNITS | NOTES |
|------------------------|-------------------------|--|--------|-------|--------|-------|-------|
| Long Accuracy          | ppm                     | see Tperiod min-max values                         | -50    | 0     | 50     | ppm   | 1,2   |
| Clock period           | Tperiod                 | 125.00MHz output nominal                           | 7.9996 | 8.000 | 8.0004 | ns    | 1     |
| Output High Voltage    | V <sub>OH</sub>         | I <sub>OH</sub> = -1 mA                            | 2.4    |       |        | V     | 1     |
| Output Low Voltage     | V <sub>OL</sub>         | I <sub>OL</sub> = 1 mA                             |        |       | 0.4    | V     | 1     |
| Output High Current    | I <sub>OH</sub>         | V <sub>OH</sub> @ MIN = 1.0 V                      | -33    |       |        | mA    | 1     |
|                        |                         | V <sub>OH</sub> @ MAX = 3.135 V                    |        |       | -33    | mA    | 1     |
| Output Low Current     | I <sub>OL</sub>         | V <sub>OL</sub> @ MIN = 1.95 V                     | 30     |       |        | mA    | 1     |
|                        |                         | V <sub>OL</sub> @ MAX = 0.4 V                      |        |       | 38     | mA    | 1     |
| Rise Time              | t <sub>r</sub>          | V <sub>OL</sub> =20%×Vdd, V <sub>OH</sub> =80%×Vdd |        | 0.66  | 0.75   | ns    | 1     |
| Fall Time              | t <sub>f</sub>          | V <sub>OL</sub> =20%×Vdd, V <sub>OH</sub> =80%×Vdd |        | 0.70  | 0.75   | ns    | 1     |
| Duty Cycle             | d <sub>t1</sub>         | V <sub>T</sub> = 1.5 V                             | 45     | 52.9  | 55     | %     | 1     |
| Group Skew             | t <sub>skew_RGMII</sub> | V <sub>T</sub> = 1.5 V,                            |        | 15    | 100    | ps    | 1     |
| Jitter, Long Term      | t <sub>jabs</sub>       | V <sub>T</sub> = 1.5 V, 10 : sec interval          |        | 141   | 500    | ps    | 1     |
| Jitter, Cycle to cycle | t <sub>jcc-cyc</sub>    | V <sub>T</sub> = 1.5 V                             |        | 75    | 250    | ps    | 1     |
| Jitter, Peak           | t <sub>jpeak</sub>      | V <sub>T</sub> = 1.5 V                             |        | 68    | 100    | ps    | 1,3   |

\*TA = 0 - 70°C; Supply Voltage VDD = 3.3 V +/-5%, CL = 5 pF with Rs as shown in the termination table (unless otherwise specified)

<sup>1</sup>Guaranteed by design and characterization, not 100% tested in production.

<sup>2</sup>All Long Term Accuracy and Clock Period specifications are guaranteed assuming that 25MHz\_x is tuned to exactly 25.000MHz

<sup>3</sup>1/2 of the peak-to-peak jitter. (Lg+ + lLg-l)/2

**Electrical Characteristics - RMII - 50MHz**

| PARAMETER           | SYMBOL                      | CONDITIONS*                                      | MIN     | TYP     | MAX    | UNITS | NOTES |
|---------------------|-----------------------------|--|---------|---------|--------|-------|-------|
| Long Accuracy       | ppm                         | see Tperiod min-max values                       | -50     | 0       | 50     | ppm   | 1,2   |
| Clock period        | Tperiod                     | 50.00MHz output nominal                          | 19.9990 | 20.0000 | 20.001 | ns    | 1     |
| Output High Voltage | V <sub>OH</sub>             | I <sub>OH</sub> = -1 mA                          | 2.4     |         |        | V     | 1     |
| Output Low Voltage  | V <sub>OL</sub>             | I <sub>OL</sub> = 1 mA                           |         |         | 0.4    | V     | 1     |
| Output High Current | I <sub>OH</sub>             | V <sub>OH</sub> @ MIN = 1.0 V                    | -33     |         |        | mA    | 1     |
|                     |                             | V <sub>OH</sub> @ MAX = 3.135 V                  |         |         | -33    | mA    | 1     |
| Output Low Current  | I <sub>OL</sub>             | V <sub>OL</sub> @ MIN = 1.95 V                   | 30      |         |        | mA    | 1     |
|                     |                             | V <sub>OL</sub> @ MAX = 0.4 V                    |         |         | 38     | mA    | 1     |
| Rise Time           | t <sub>r</sub>              | V <sub>OL</sub> = 0.4 V, V <sub>OH</sub> = 2.4 V | 0.5     | 1.1     | 3      | ns    | 1     |
| Fall Time           | t <sub>f</sub>              | V <sub>OH</sub> = 2.4 V, V <sub>OL</sub> = 0.4 V | 0.5     | 1.1     | 3      | ns    | 1     |
| Duty Cycle          | d <sub>t1</sub>             | V <sub>T</sub> = 1.5 V                           | 35      | 51.5    | 65     | %     | 1     |
| Group Skew          | t <sub>skew_RMII(5:0)</sub> | V <sub>T</sub> = 1.5 V,<br>across all 6 outputs  |         | 60      | 200    | ps    | 1     |
| Jitter, Long Term   | t <sub>jabs</sub>           | V <sub>T</sub> = 1.5 V, 10 9sec interval         |         | 127     | 500    | ps    | 1     |
| Jitter, Peak        | t <sub>jpeak</sub>          | V <sub>T</sub> = 1.5 V                           |         | 88      | 100    | ps    | 1,3   |

\*TA = 0 - 70°C; Supply Voltage VDD = 3.3 V +/-5%, CL = 5 pF with Rs as shown in the termination table (unless otherwise specified)

<sup>1</sup>Guaranteed by design and characterization, not 100% tested in production.

<sup>2</sup>All Long Term Accuracy and Clock Period specifications are guaranteed assuming that 25MHz\_x is tuned to exactly 25.000MHz

<sup>3</sup>1/2 of the peak-to-peak jitter. (Lg+ + lLg-l)/2

**Electrical Characteristics - 33.33MHz**

| PARAMETER              | SYMBOL                | CONDITIONS*                                      | MIN     | TYP     | MAX     | UNITS | NOTES |
|------------------------|-----------------------|--|---------|---------|---------|-------|-------|
| Long Accuracy          | ppm                   | see Tperiod min-max values                       | -100    | 0       | 100     | ppm   | 1     |
| Clock period           | Tperiod               | 33.33MHz output non-spread                       | 29.9970 | 30.0000 | 30.0030 | ns    | 1     |
| Output High Voltage    | V <sub>OH</sub>       | I <sub>OH</sub> = -1 mA                          | 2.4     |         |         | V     | 1     |
| Output Low Voltage     | V <sub>OL</sub>       | I <sub>OL</sub> = 1 mA                           |         |         | 0.4     | V     | 1     |
| Output High Current    | I <sub>OH</sub>       | V <sub>OH</sub> @ MIN = 1.0 V                    | -33     |         |         | mA    | 1     |
|                        |                       | V <sub>OH</sub> @ MAX = 3.135 V                  |         |         | -33     | mA    | 1     |
| Output Low Current     | I <sub>OL</sub>       | V <sub>OL</sub> @ MIN = 1.95 V                   | 30      |         |         | mA    | 1     |
|                        |                       | V <sub>OL</sub> @ MAX = 0.4 V                    |         |         | 38      | mA    | 1     |
| Rise Time              | t <sub>r</sub>        | V <sub>OL</sub> = 0.4 V, V <sub>OH</sub> = 2.4 V | 0.5     | 0.87    | 2       | ns    | 1     |
| Fall Time              | t <sub>f</sub>        | V <sub>OH</sub> = 2.4 V, V <sub>OL</sub> = 0.4 V | 0.5     | 1.35    | 2       | ns    | 1     |
| Duty Cycle             | d <sub>t1</sub>       | V <sub>T</sub> = 1.5 V                           | 45      | 50.7    | 55      | %     | 1     |
| Jitter, Cycle to cycle | t <sub>jCYC-CYC</sub> | V <sub>T</sub> = 1.5 V                           |         | 104     | 350     | ps    | 1     |

\*TA = 0 - 70°C; Supply Voltage VDD = 3.3 V +/-5%, CL = 5 pF with Rs as shown in the termination table (unless otherwise specified)

<sup>1</sup>Guaranteed by design and characterization, not 100% tested in production.

**Electrical Characteristics - 32.768KHz**

| PARAMETER              | SYMBOL                | CONDITIONS*                                      | MIN     | TYP     | MAX     | UNITS | NOTES |
|------------------------|-----------------------|--|---------|---------|---------|-------|-------|
| Long Accuracy          | ppm                   | see Tperiod min-max values                       | -100    | -79     | 100     | ppm   | 1     |
| Clock period           | Tperiod               | 32.768KHz output nominal                         | 30.5149 | 30.5180 | 30.5211 | us    | 1     |
| Output High Voltage    | V <sub>OH</sub>       | I <sub>OH</sub> = -1 mA                          | 2.4     |         |         | V     | 1     |
| Output Low Voltage     | V <sub>OL</sub>       | I <sub>OL</sub> = 1 mA                           |         |         | 0.4     | V     | 1     |
| Output High Current    | I <sub>OH</sub>       | V <sub>OH</sub> @ MIN = 1.0 V                    | -33     |         |         | mA    | 1     |
|                        |                       | V <sub>OH</sub> @ MAX = 3.135 V                  |         |         | -33     | mA    | 1     |
| Output Low Current     | I <sub>OL</sub>       | V <sub>OL</sub> @ MIN = 1.95 V                   | 30      |         |         | mA    | 1     |
|                        |                       | V <sub>OL</sub> @ MAX = 0.4 V                    |         |         | 38      | mA    | 1     |
| Rise Time              | t <sub>r</sub>        | V <sub>OL</sub> = 0.4 V, V <sub>OH</sub> = 2.4 V | 0.5     | 1.39    | 4       | ns    | 1     |
| Fall Time              | t <sub>f</sub>        | V <sub>OH</sub> = 2.4 V, V <sub>OL</sub> = 0.4 V | 0.5     | 1.6     | 4       | ns    | 1     |
| Duty Cycle             | d <sub>t1</sub>       | V <sub>T</sub> = 1.5 V                           | 45      | 49.5    | 55      | %     | 1     |
| Jitter, Cycle to cycle | t <sub>jCYC-CYC</sub> | V <sub>T</sub> = 1.5 V                           |         | 220     | 500     | ps    | 1     |

\*TA = 0 - 70°C; Supply Voltage VDD = 3.3 V +/-5%, CL = 5 pF with Rs as shown in the termination table (unless otherwise specified)

<sup>1</sup>Guaranteed by design and characterization, not 100% tested in production.

## General SMBus serial interface information for the 9FGP205

### How to Write:

- Controller (host) sends a start bit.
- Controller (host) sends the write address D2<sub>(H)</sub>
- ICS clock will **acknowledge**
- Controller (host) sends the beginning byte location = N
- ICS clock will **acknowledge**
- Controller (host) sends the data byte count = X
- ICS clock will **acknowledge**
- Controller (host) starts sending **Byte N through Byte N + X - 1**
- ICS clock will **acknowledge** each byte **one at a time**
- Controller (host) sends a Stop bit

### How to Read:

- Controller (host) will send start bit.
- Controller (host) sends the write address D2<sub>(H)</sub>
- ICS clock will **acknowledge**
- Controller (host) sends the beginning byte location = N
- ICS clock will **acknowledge**
- Controller (host) will send a separate start bit.
- Controller (host) sends the read address D3<sub>(H)</sub>
- ICS clock will **acknowledge**
- ICS clock will send the data byte count = X
- ICS clock sends **Byte N + X - 1**
- ICS clock sends **Byte 0 through byte X (if X<sub>(H)</sub> was written to byte 8).**
- Controller (host) will need to acknowledge each byte
- Controller (host) will send a not acknowledge bit
- Controller (host) will send a stop bit

| Index Block Write Operation      |           |                      |
|----------------------------------|-----------|----------------------|
| Controller (Host)                |           | ICS (Slave/Receiver) |
| T                                | starT bit |                      |
| Slave Address *D0 <sub>(H)</sub> |           |                      |
| WR                               | WRite     |                      |
|                                  |           | ACK                  |
| Beginning Byte = N               |           |                      |
|                                  |           | ACK                  |
| Data Byte Count = X              |           |                      |
|                                  |           | ACK                  |
| Beginning Byte N                 | X Byte    |                      |
| ◇                                |           | ACK                  |
| ◇                                |           | ◇                    |
| ◇                                |           | ◇                    |
| ◇                                |           | ◇                    |
| Byte N + X - 1                   |           |                      |
|                                  |           | ACK                  |
| P                                | stoP bit  |                      |

| Index Block Read Operation       |                 |                      |
|----------------------------------|-----------------|----------------------|
| Controller (Host)                |                 | ICS (Slave/Receiver) |
| T                                | starT bit       |                      |
| Slave Address *D0 <sub>(H)</sub> |                 |                      |
| WR                               | WRite           |                      |
|                                  |                 | ACK                  |
| Beginning Byte = N               |                 |                      |
|                                  |                 | ACK                  |
| RT                               | Repeat starT    |                      |
| Slave Address *D1 <sub>(H)</sub> |                 |                      |
| RD                               | ReaD            |                      |
|                                  |                 | ACK                  |
|                                  |                 | Data Byte Count = X  |
| ACK                              |                 |                      |
| ACK                              |                 | Beginning Byte N     |
| ◇                                |                 | ◇                    |
| ◇                                |                 | ◇                    |
| ◇                                |                 | ◇                    |
|                                  |                 | Byte N + X - 1       |
| N                                | Not acknowledge |                      |
| P                                | stoP bit        |                      |

\* By default, SMBADR = 0, therefore, SMBus WRITE/READ address is D0/D1. Please see SMBus Address Selection table on page 1.

SMBus Table: CPU Frequency Select and Spread Spectrum Control Register

| Byte 0 | Pin # | Name        | Control Function             | Type | 0  | 1       | PWD |
|--------|-------|-------------|------------------------------|------|--|---------|-----|
| Bit 7  | -     | WOL_STOP_EN | Enables 25M in Power Down    | RW   | Disable  | Enabled | 1   |
| Bit 6  | -     | Reserved    | Reserved                     | RW   | Reserved   |         | 0   |
| Bit 5  | -     | Reserved    | Reserved                     | RW   | Reserved   |         | 0   |
| Bit 4  | -     | DOT96 SS_EN | DOT96 Spread Spectrum Enable | RW   | Disable  | Enable  | 0   |
| Bit 3  | -     | CPU SS_EN   | CPU Spread Spectrum Enable   | RW   | See Table 1:<br>CPU Frequency Selection<br>Table |         | 0   |
| Bit 2  | -     | CPU FS2     | CPU Freq Select Bit 2        | RW   |  |         | 1   |
| Bit 1  | -     | CPU FS1     | CPU Freq Select Bit 1        | RW   |  |         | 0   |
| Bit 0  | -     | CPU FS0     | CPU Freq Select Bit 0        | RW   |  |         | 1   |

SMBus Table: RMII Output Control Register

| Byte 1 | Pin # | Name           | Control Function       | Type | 0       | 1      | PWD |
|--------|-------|----------------|------------------------|------|---------|--------|-----|
| Bit 7  | 24    | RMII_5 Enable  | RMII_7 Output Control  | RW   | Disable | Enable | 1   |
| Bit 6  | 25    | RMII_4 Enable  | RMII_6 Output Control  | RW   | Disable | Enable | 1   |
| Bit 5  | 28    | RMII_3 Enable  | RMII_5 Output Control  | RW   | Disable | Enable | 1   |
| Bit 4  | 29    | RMII_2 Enable  | RMII_4 Output Control  | RW   | Disable | Enable | 1   |
| Bit 3  | 32    | RMII_1 Enable  | RMII_3 Output Control  | RW   | Disable | Enable | 1   |
| Bit 2  | 33    | RMII_0 Enable  | RMII_2 Output Control  | RW   | Disable | Enable | 1   |
| Bit 1  | 36    | RGMII_1 Enable | RGMII_1 Output Control | RW   | Disable | Enable | 1   |
| Bit 0  | 37    | RGMII_0 Enable | RGMII_0 Output Control | RW   | Disable | Enable | 1   |

SMBus Table: DOT, CPU, 32.768KHz, 25MHz and 33.33MHz Outputs Control Register

| Byte 2 | Pin # | Name                  | Control Function         | Type | 0       | 1      | PWD |
|--------|-------|-----------------------|--------------------------|------|---------|--------|-----|
| Bit 7  | 7,8   | CPUCLK PD Drive Mode  | Driven in power down     | RW   | Driven  | Hi-Z   | 1   |
| Bit 6  | 3,4   | DOT96SS PD Drive Mode | Driven in power down     | RW   | Driven  | Hi-Z   | 1   |
| Bit 5  | 22    | 33.33MHz Enable       | 33.33MHz Output Control  | RW   | Disable | Enable | 1   |
| Bit 4  | 17    | 25MHz_1 Enable        | 25MHz_1 Output Control   | RW   | Disable | Enable | 1   |
| Bit 3  | 16    | 25MHz_0 Enable        | 25MHz_0 Output Control   | RW   | Disable | Enable | 1   |
| Bit 2  | 13    | 32.768kHz Enable      | 32.768KHz Output Control | RW   | Disable | Enable | 1   |
| Bit 1  | 6     | CPUCLK Enable         | CPUCLK Output Control    | RW   | Disable | Enable | 1   |
| Bit 0  | 5     | DOT96SS Enable        | DOT96SS Output Control   | RW   | Disable | Enable | 1   |

SMBus Table: DOT96 Frequency Select and Spread Spectrum Control Register

| Byte 3 | Pin # | Name            | Control Function          | Type | 0  | 1    | PWD |
|--------|-------|-----------------|---------------------------|------|--|------|-----|
| Bit 7  | 24    | RMII_5 WOL_STOP | RMII_5 runs in power down | RW   | Off  | Runs | 0   |
| Bit 6  | 25    | RMII_4 WOL_STOP | RMII_4 runs in power down | RW   | Off  | Runs | 0   |
| Bit 5  | 28    | RMII_3 WOL_STOP | RMII_3 runs in power down | RW   | Off  | Runs | 0   |
| Bit 4  | 29    | RMII_2 WOL_STOP | RMII_2 runs in power down | RW   | Off  | Runs | 1   |
| Bit 3  | -     | DOT96SS FS3     | DOT96 Freq Select Bit 3   | RW   | See Table 2:<br>DOT Frequency Selection<br>Table |      | 0   |
| Bit 2  | -     | DOT96SS FS2     | DOT96 Freq Select Bit 2   | RW   |  |      | 0   |
| Bit 1  | -     | DOT96SS FS1     | DOT96 Freq Select Bit 1   | RW   |  |      | 0   |
| Bit 0  | -     | DOT96SS FS0     | DOT96 Freq Select Bit 0   | RW   |  |      | 0   |

SMBus Table: RMII Strength Control Register

| Byte 4 | Pin # | Name            | Control Function          | Type | 0           | 1            | PWD |
|--------|-------|-----------------|---------------------------|------|-------------|--------------|-----|
| Bit 7  | 24    | RMII_5 Str      | RMII_5 Strength Control   | RW   | 1-Load (1X) | 2-Loads (2X) | 0   |
| Bit 6  | 25    | RMII_4 Str      | RMII_4 Strength Control   | RW   | 1-Load (1X) | 2-Loads (2X) | 0   |
| Bit 5  | 28    | RMII_3 Str      | RMII_3 Strength Control   | RW   | 1-Load (1X) | 2-Loads (2X) | 0   |
| Bit 4  | 29    | RMII_2 Str      | RMII_2 Strength Control   | RW   | 1-Load (1X) | 2-Loads (2X) | 0   |
| Bit 3  | 32    | RMII_1 Str      | RMII_1 Strength Control   | RW   | 1-Load (1X) | 2-Loads (2X) | 0   |
| Bit 2  | 33    | RMII_0 Str      | RMII_0 Strength Control   | RW   | 1-Load (1X) | 2-Loads (2X) | 0   |
| Bit 1  | 32    | RMII_1 WOL_STOP | RMII_1 runs in power down | RW   | Off         | Runs         | 1   |
| Bit 0  | 33    | RMII_0 WOL_STOP | RMII_0 runs in power down | RW   | Off         | Runs         | 1   |

SMBus Table: 32.768KHz, 25Mhz and 33.33MHz Strength Control Register

| Byte 5 | Pin # | Name             | Control Function           | Type | 0           | 1            | PWD |
|--------|-------|------------------|----------------------------|------|-------------|--------------|-----|
| Bit 7  | -     | Reserved         | Reserved                   | RW   | Reserved    |              | 0   |
| Bit 6  | -     | Reserved         | Reserved                   | RW   | Reserved    |              | 0   |
| Bit 5  | 22    | 33.33MHz Str     | 33.33MHz Strength Control  | RW   | 1-Load (1X) | 2-Loads (2X) | 1   |
| Bit 4  | 17    | 25MHz_1 Str      | 25MHz_1 Strength Control   | RW   | 1-Load (1X) | 2-Loads (2X) | 1   |
| Bit 3  | 16    | 25MHz_0 Str      | 25MHz_1 Strength Control   | RW   | 1-Load (1X) | 2-Loads (2X) | 1   |
| Bit 2  | 13    | 32.768kHz Str    | 32.768kHz Strength Control | RW   | 1-Load (1X) | 2-Loads (2X) | 1   |
| Bit 1  | 17    | 25MHz_1_WOL_STOP | 25MHz_1 runs in power down | RW   | Off         | Runs         | 0   |
| Bit 0  | 16    | 25MHz_0_WOL_STOP | 25MHz_0 runs in power down | RW   | Off         | Runs         | 1   |

SMBus Table: Vendor &amp; Revision ID Register

| Byte 6 | Pin # | Name | Control Function | Type | 0                            | 1 | PWD |
|--------|-------|------|------------------|------|------------------------------|---|-----|
| Bit 7  | -     | RID3 | REVISION ID      | R    | A rev = 0000<br>B rev = 0001 |   | X   |
| Bit 6  | -     | RID2 |                  | R    |                              |   | X   |
| Bit 5  | -     | RID1 |                  | R    |                              |   | X   |
| Bit 4  | -     | RID0 |                  | R    |                              |   | X   |
| Bit 3  | -     | VID3 | VENDOR ID        | R    | ICS/IDT = 0001               |   | 0   |
| Bit 2  | -     | VID2 |                  | R    |                              |   | 0   |
| Bit 1  | -     | VID1 |                  | R    |                              |   | 0   |
| Bit 0  | -     | VID0 |                  | R    |                              |   | 1   |

SMBus Table: Device ID

| Byte 7 | Pin # | Name              | Control Function | Type | 0        | 1 | PWD |
|--------|-------|-------------------|------------------|------|----------|---|-----|
| Bit 7  | -     | Device ID 7 (MSB) | Device ID        | R    | Reserved |   | 0   |
| Bit 6  | -     | Device ID 6       |                  | R    | Reserved |   | 0   |
| Bit 5  | -     | Device ID 5       |                  | R    | Reserved |   | 1   |
| Bit 4  | -     | Device ID 4       |                  | R    | Reserved |   | 0   |
| Bit 3  | -     | Device ID 3       |                  | R    | Reserved |   | 0   |
| Bit 2  | -     | Device ID 2       |                  | R    | Reserved |   | 1   |
| Bit 1  | -     | Device ID 1       |                  | R    | Reserved |   | 0   |
| Bit 0  | -     | Device ID 0 (LSB) |                  | R    | Reserved |   | 1   |

SMBus Table: Byte Count Register

| Byte 8 | Pin # | Name | Control Function  | Type | 0 | 1 | PWD |
|--------|-------|------|---|------|---|---|-----|
| Bit 7  | -     | BC7  | Writing to this register configures how many bytes will be read back. | RW   | - | - | 0   |
| Bit 6  | -     | BC6  |   | RW   | - | - | 0   |
| Bit 5  | -     | BC5  |   | RW   | - | - | 0   |
| Bit 4  | -     | BC4  |   | RW   | - | - | 0   |
| Bit 3  | -     | BC3  |   | RW   | - | - | 1   |
| Bit 2  | -     | BC2  |   | RW   | - | - | 0   |
| Bit 1  | -     | BC1  |   | RW   | - | - | 0   |
| Bit 0  | -     | BC0  |   | RW   | - | - | 1   |

SMBus Table: Reserved

| Byte 9 | Pin # | Name | Control Function | Type | 0 | 1 | PWD |
|--------|-------|------|------------------|------|---|---|-----|
| Bit 7  |       |      | Reserved         |      |   |   | 0   |
| Bit 6  |       |      | Reserved         |      |   |   | 0   |
| Bit 5  |       |      | Reserved         |      |   |   | 0   |
| Bit 4  |       |      | Reserved         |      |   |   | 0   |
| Bit 3  |       |      | Reserved         |      |   |   | 0   |
| Bit 2  |       |      | Reserved         |      |   |   | 0   |
| Bit 1  |       |      | Reserved         |      |   |   | 0   |
| Bit 0  |       |      | Reserved         |      |   |   | 0   |

SMBus Table: PLLs M/N Programming Enable Register

| Byte 10 | Pin # | Name   | Control Function            | Type | 0       | 1      | PWD |
|---------|-------|--------|-----------------------------|------|---------|--------|-----|
| Bit 7   | -     | M/N_EN | PLLs M/N Programming Enable | RW   | Disable | Enable | 0   |
| Bit 6   |       |        | Reserved                    |      |         |        | 0   |
| Bit 5   |       |        | Reserved                    |      |         |        | 0   |
| Bit 4   |       |        | Reserved                    |      |         |        | 0   |
| Bit 3   |       |        | Reserved                    |      |         |        | 0   |
| Bit 2   |       |        | Reserved                    |      |         |        | 0   |
| Bit 1   |       |        | Reserved                    |      |         |        | 0   |
| Bit 0   |       |        | Reserved                    |      |         |        | 0   |

SMBus Table: CPU PLL VCO Frequency Control Register

| Byte 11 | Pin # | Name    | Control Function           | Type | 0  | 1 | PWD |
|---------|-------|---------|----------------------------|------|--|---|-----|
| Bit 7   | -     | N Div8  | N Divider Prog bit 8       | RW   | The decimal representation of M and N Divier in Byte 11 and 12 will configure the VCO frequency. Default at power up = latch-in or Byte 0 Rom table. VCO Frequency = $25 \times [N\text{Div}(9:0)+8] / [M\text{Div}(5:0)+2]$ |   | X   |
| Bit 6   | -     | N Div 9 | N Divider Prog bit 9       | RW   |  |   |     |
| Bit 5   | -     | M Div5  | M Divider Programming bits | RW   |  |   |     |
| Bit 4   | -     | M Div4  |                            | RW   |  |   |     |
| Bit 3   | -     | M Div3  |                            | RW   |  |   |     |
| Bit 2   | -     | M Div2  |                            | RW   |  |   |     |
| Bit 1   | -     | M Div1  |                            | RW   |  |   |     |
| Bit 0   | -     | M Div0  |                            | RW   |  |   |     |

SMBus Table: CPU PLL VCO Frequency Control Register

| Byte 12 | Pin # | Name   | Control Function             | Type | 0  | 1 | PWD |
|---------|-------|--------|------------------------------|------|--|---|-----|
| Bit 7   | -     | N Div7 | N Divider Programming b(7:0) | RW   | The decimal representation of M and N Divier in Byte 11 and 12 will configure the VCO frequency. Default at power up = latch-in or Byte 0 Rom table. VCO Frequency = $25 \times [N\text{Div}(9:0)+8] / [M\text{Div}(5:0)+2]$ |   | X   |
| Bit 6   | -     | N Div6 |                              | RW   |  |   |     |
| Bit 5   | -     | N Div5 |                              | RW   |  |   |     |
| Bit 4   | -     | N Div4 |                              | RW   |  |   |     |
| Bit 3   | -     | N Div3 |                              | RW   |  |   |     |
| Bit 2   | -     | N Div2 |                              | RW   |  |   |     |
| Bit 1   | -     | N Div1 |                              | RW   |  |   |     |
| Bit 0   | -     | N Div0 |                              | RW   |  |   |     |

SMBus Table: CPU PLL Spread Spectrum Control Register

| Byte 13 | Pin # | Name | Control Function                   | Type | 0  | 1 | PWD |
|---------|-------|------|------------------------------------|------|--|---|-----|
| Bit 7   | -     | SSP7 | Spread Spectrum Programming b(7:0) | RW   | These Spread Spectrum bits in Byte 13 and 14 will program the spread percentage. It is recommended to use ICS Spread % table for spread programming. |   | X   |
| Bit 6   | -     | SSP6 |                                    | RW   |  |   |     |
| Bit 5   | -     | SSP5 |                                    | RW   |  |   |     |
| Bit 4   | -     | SSP4 |                                    | RW   |  |   |     |
| Bit 3   | -     | SSP3 |                                    | RW   |  |   |     |
| Bit 2   | -     | SSP2 |                                    | RW   |  |   |     |
| Bit 1   | -     | SSP1 |                                    | RW   |  |   |     |
| Bit 0   | -     | SSP0 |                                    | RW   |  |   |     |

SMBus Table: CPU PLL Spread Spectrum Control Register

| Byte 14 | Pin # | Name  | Control Function                    | Type | 0  | 1 | PWD |
|---------|-------|-------|-------------------------------------|------|--|---|-----|
| Bit 7   |       |       | Reserved                            |      |  |   | 0   |
| Bit 6   | -     | SSP14 | Spread Spectrum Programming b(14:8) | RW   | These Spread Spectrum bits in Byte 13 and 14 will program the spread percentage. It is recommended to use ICS Spread % table for spread programming. |   | X   |
| Bit 5   | -     | SSP13 |                                     | RW   |  |   |     |
| Bit 4   | -     | SSP12 |                                     | RW   |  |   |     |
| Bit 3   | -     | SSP11 |                                     | RW   |  |   |     |
| Bit 2   | -     | SSP10 |                                     | RW   |  |   |     |
| Bit 1   | -     | SSP9  |                                     | RW   |  |   |     |
| Bit 0   | -     | SSP8  |                                     | RW   |  |   |     |

SMBus Table: DOT PLL VCO Frequency Control Register

| Byte 15 | Pin # | Name   | Control Function           | Type | 0  | 1 | PWD |
|---------|-------|--------|----------------------------|------|--|---|-----|
| Bit 7   | -     | N Div8 | N Divider Prog bit 8       | RW   | The decimal representation of M and N Divier in Byte 17 and 18 will configure the VCO frequency. Default at power up = Byte 0 Rom table. VCO Frequency = $25 \times [\text{NDiv}(9:0)+8] / [\text{MDiv}(5:0)+2]$ |   | X   |
| Bit 6   | -     | N Div9 | N Divider Prog bit 9       | RW   |  |   |     |
| Bit 5   | -     | M Div5 | M Divider Programming bits | RW   |  |   |     |
| Bit 4   | -     | M Div4 |                            | RW   |  |   |     |
| Bit 3   | -     | M Div3 |                            | RW   |  |   |     |
| Bit 2   | -     | M Div2 |                            | RW   |  |   |     |
| Bit 1   | -     | M Div1 |                            | RW   |  |   |     |
| Bit 0   | -     | M Div0 |                            | RW   |  |   |     |

SMBus Table: DOT PLL VCO Frequency Control Register

| Byte 16 | Pin # | Name   | Control Function             | Type | 0  | 1 | PWD |
|---------|-------|--------|------------------------------|------|--|---|-----|
| Bit 7   | -     | N Div7 | N Divider Programming b(7:0) | RW   | The decimal representation of M and N Divier in Byte 17 and 18 will configure the VCO frequency. Default at power up = Byte 0 Rom table. VCO Frequency = $25 \times [\text{NDiv}(9:0)+8] / [\text{MDiv}(5:0)+2]$ |   | X   |
| Bit 6   | -     | N Div6 |                              | RW   |  |   |     |
| Bit 5   | -     | N Div5 |                              | RW   |  |   |     |
| Bit 4   | -     | N Div4 |                              | RW   |  |   |     |
| Bit 3   | -     | N Div3 |                              | RW   |  |   |     |
| Bit 2   | -     | N Div2 |                              | RW   |  |   |     |
| Bit 1   | -     | N Div1 |                              | RW   |  |   |     |
| Bit 0   | -     | N Div0 |                              | RW   |  |   |     |

SMBus Table: DOT PLL Spread Spectrum Control Register


| Byte 17 | Pin # | Name | Control Function                   | Type | 0  | 1 | PWD |
|---------|-------|------|------------------------------------|------|--|---|-----|
| Bit 7   | -     | SSP7 | Spread Spectrum Programming b(7:0) | RW   | These Spread Spectrum bits in Byte 19 and 20 will program the spread percentage. It is recommended to use ICS Spread % table for spread programming. |   | X   |
| Bit 6   | -     | SSP6 |                                    | RW   |  |   |     |
| Bit 5   | -     | SSP5 |                                    | RW   |  |   |     |
| Bit 4   | -     | SSP4 |                                    | RW   |  |   |     |
| Bit 3   | -     | SSP3 |                                    | RW   |  |   |     |
| Bit 2   | -     | SSP2 |                                    | RW   |  |   |     |
| Bit 1   | -     | SSP1 |                                    | RW   |  |   |     |
| Bit 0   | -     | SSP0 |                                    | RW   |  |   |     |

SMBus Table: DOT PLL Spread Spectrum Control Register

| Byte 18 | Pin # | Name  | Control Function                    | Type | 0  | 1 | PWD |
|---------|-------|-------|-------------------------------------|------|--|---|-----|
| Bit 7   | -     |       | Reserved                            |      |  |   | 0   |
| Bit 6   | -     | SSP14 | Spread Spectrum Programming b(14:8) | RW   | These Spread Spectrum bits in Byte 19 and 20 will program the spread percentage. It is recommended to use ICS Spread % table for spread programming. |   | X   |
| Bit 5   | -     | SSP13 |                                     | RW   |  |   |     |
| Bit 4   | -     | SSP12 |                                     | RW   |  |   |     |
| Bit 3   | -     | SSP11 |                                     | RW   |  |   |     |
| Bit 2   | -     | SSP10 |                                     | RW   |  |   |     |
| Bit 1   | -     | SSP9  |                                     | RW   |  |   |     |
| Bit 0   | -     | SSP8  |                                     | RW   |  |   |     |

Bytes 19:21 are reserved.



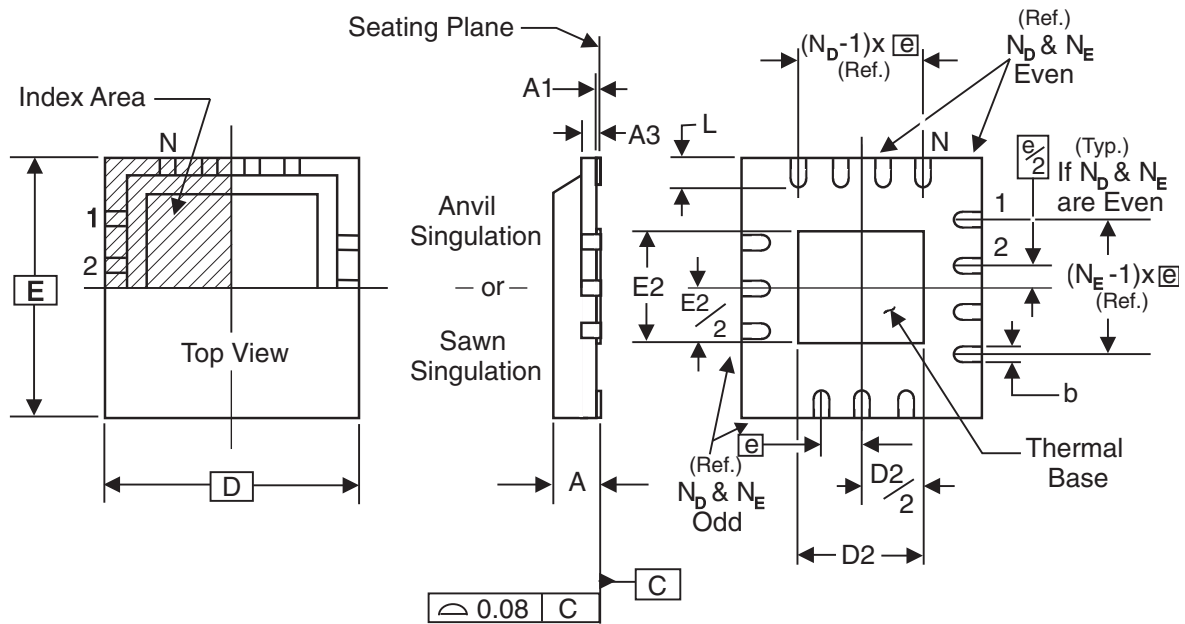

**THERMALLY ENHANCED, VERY THIN, FINE PITCH  
 QUAD FLAT / NO LEAD PLASTIC PACKAGE**

**DIMENSIONS**

| SYMBOL | MIN.           | MAX. |
|--------|----------------|------|
| A      | 0.8            | 1.0  |
| A1     | 0              | 0.05 |
| A3     | 0.25 Reference |      |
| b      | 0.18           | 0.3  |
| e      | 0.50 BASIC     |      |

**DIMENSIONS** (JEDEC reference only) (IDT package)

| SYMBOL         | VJJD-2 / -5 | 40L TOLERANCE |
|----------------|-------------|---------------|
| N              | 40          | 40            |
| N <sub>D</sub> | 10          | 10            |
| N <sub>E</sub> | 10          | 10            |
| D x E BASIC    | 6.00 x 6.00 | 6.00 x 6.00   |
| D2 MIN. / MAX. | 1.75 / 4.80 | 2.75 / 3.0    |
| E2 MIN. / MAX. | 1.75 / 4.80 | 2.75 / 3.0    |
| L MIN. / MAX.  | 0.30 / 0.50 | 0.3 / 0.5     |

## Ordering Information

| Part / Order Number | Shipping Packaging | Package    | Temperature |
|---------------------|--------------------|------------|-------------|
| 9FGP205AKLF         | Trays              | 40-pin MLF | 0 to +70° C |
| 9FGP205AKLFT        | Tape and Reel      | 40-pin MLF | 0 to +70° C |

“LF” to the suffix are the Pb-Free configuration and are RoHS compliant.

“A” is the device revision designer (will not correlate with the datasheet revision).

### Revision History

| Rev. | Issue Date | Who  | Description   | Page #    |
|------|------------|------|---|-----------|
| A    | 7/16/2014  | D.C. | 1. Updated VIH/VIL to 1.8 and 1.4V respectively<br>2. Updated Rise/Fall times from 1ns to 0.5ns | 7,9,10,11 |

---

## IMPORTANT NOTICE AND DISCLAIMER

RENESAS ELECTRONICS CORPORATION AND ITS SUBSIDIARIES (“RENESAS”) PROVIDES TECHNICAL SPECIFICATIONS AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for developers skilled in the art designing with Renesas products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. Renesas grants you permission to use these resources only for development of an application that uses Renesas products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Renesas intellectual property or to any third party intellectual property. Renesas disclaims responsibility for, and you will fully indemnify Renesas and its representatives against, any claims, damages, costs, losses, or liabilities arising out of your use of these resources. Renesas' products are provided only subject to Renesas' Terms and Conditions of Sale or other applicable terms agreed to in writing. No use of any Renesas resources expands or otherwise alters any applicable warranties or warranty disclaimers for these products.

(Rev.1.0 Mar 2020)

### Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,  
Koto-ku, Tokyo 135-0061, Japan  
[www.renesas.com](http://www.renesas.com)

### Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit:  
[www.renesas.com/contact/](http://www.renesas.com/contact/)

### Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.