

NTF6P02, NVF6P02

MOSFET – Power, P-Channel, SOT-223

-10 A, -20 V

Features

- Low $R_{DS(on)}$
- Logic Level Gate Drive
- Diode Exhibits High Speed, Soft Recovery
- Avalanche Energy Specified
- NVF Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable*
- These Devices are Pb-Free and are RoHS Compliant

Typical Applications

- Power Management in Portables and Battery-Powered Products, i.e.: Cellular and Cordless Telephones and PCMCIA Cards

MAXIMUM RATINGS ($T_J = 25^\circ\text{C}$ unless otherwise noted)

Rating	Symbol	Value	Unit
Drain-to-Source Voltage	V_{DS}	-20	Vdc
Gate-to-Source Voltage	V_{GS}	± 8.0	Vdc
Drain Current (Note 1) - Continuous @ $T_A = 25^\circ\text{C}$ - Continuous @ $T_A = 70^\circ\text{C}$ - Single Pulse ($t_p = 10 \mu\text{s}$)	I_D I_D I_{DM}	-10 -8.4 -35	Adc Adc Apk
Total Power Dissipation @ $T_A = 25^\circ\text{C}$	P_D	8.3	W
Operating and Storage Temperature Range	T_J, T_{stg}	-55 to +150	$^\circ\text{C}$
Single Pulse Drain-to-Source Avalanche Energy – Starting $T_J = 25^\circ\text{C}$ ($V_{DD} = -20 \text{ Vdc}$, $V_{GS} = -5.0 \text{ Vdc}$, $I_{L(pk)} = -10 \text{ A}$, $L = 3.0 \text{ mH}$, $R_G = 25\Omega$)	E_{AS}	150	mJ
Thermal Resistance - Junction to Lead (Note 1) - Junction to Ambient (Note 2) - Junction to Ambient (Note 3)	$R_{\theta JL}$ $R_{\theta JA}$ $R_{\theta JA}$	15 71.4 160	$^\circ\text{C/W}$
Maximum Lead Temperature for Soldering Purposes, 1/8" from case for 10 seconds	T_L	260	$^\circ\text{C}$

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Steady State.
2. When surface mounted to an FR4 board using 1" pad size, (Cu. Area 1.127 sq in), Steady State.
3. When surface mounted to an FR4 board using minimum recommended pad size, (Cu. Area 0.412 sq in), Steady State.




ON Semiconductor®

www.onsemi.com

-10 AMPERES

-20 VOLTS

$R_{DS(on)} = 44 \text{ m}\Omega$ (Typ.)




P-Channel MOSFET

MARKING DIAGRAM & PIN ASSIGNMENT



**SOT-223
CASE 318E
STYLE 3**



A = Assembly Location
Y = Year
W = Work Week
F6P02 = Specific Device Code
▪ = Pb-Free Package
(Note: Microdot may be in either location)

ORDERING INFORMATION

Device	Package	Shipping†
NTF6P02T3G	SOT-223 (Pb-Free)	4000 / Tape & Reel
NVF6P02T3G*	SOT-223 (Pb-Free)	4000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

NTF6P02, NVF6P02

ELECTRICAL CHARACTERISTICS (T_J = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
----------------	--------	-----	-----	-----	------

OFF CHARACTERISTICS

Drain-to-Source Breakdown Voltage (Note 4) (V _{GS} = 0 Vdc, I _D = -250 µAdc)	V _{(BR)DSS}	-20	-25	-	Vdc
Temperature Coefficient (Positive)		-	-11	-	mV/°C
Zero Gate Voltage Drain Current (V _{DS} = -20 Vdc, V _{GS} = 0 Vdc) (V _{DS} = -20 Vdc, V _{GS} = 0 Vdc, T _J = 125°C)	I _{DSS}	-	-	-1.0 -10	µAdc
Gate-Body Leakage Current (V _{GS} = ± 8.0 Vdc, V _{DS} = 0 Vdc)	I _{GSS}	-	-	± 100	nAdc

ON CHARACTERISTICS (Note 4)

Gate Threshold Voltage (Note 4) (V _{DS} = V _{GS} , I _D = -250 µAdc)	V _{GS(th)}	-0.4	-0.7	-1.0	Vdc
Threshold Temperature Coefficient (Negative)		-	2.6	-	mV/°C
Static Drain-to-Source On-Resistance (Note 4) (V _{GS} = -4.5 Vdc, I _D = -6.0 Adc) (V _{GS} = -2.5 Vdc, I _D = -4.0 Adc) (V _{GS} = -2.5 Vdc, I _D = -3.0 Adc)	R _{DS(on)}	-	44 57 57	50 70 -	mΩ
Forward Transconductance (Note 4) (V _{DS} = -10 Vdc, I _D = -6.0 Adc)	g _{fs}	-	12	-	Mhos

DYNAMIC CHARACTERISTICS

Input Capacitance	(V _{DS} = -16 Vdc, V _{GS} = 0 V, f = 1.0 MHz)	C _{iss}	-	900	1200	pF
Output Capacitance		C _{oss}	-	350	500	
Transfer Capacitance		C _{rss}	-	90	150	
Input Capacitance	(V _{DS} = -10 Vdc, V _{GS} = 0 V, f = 1.0 MHz)	C _{iss}	-	940	-	pF
Output Capacitance		C _{oss}	-	410	-	
Transfer Capacitance		C _{rss}	-	110	-	

SWITCHING CHARACTERISTICS (Note 5)

Turn-On Delay Time	(V _{DD} = -5.0 Vdc, I _D = -1.0 Adc, V _{GS} = -4.5 Vdc, R _G = 6.0 Ω)	t _{d(on)}	-	7.0	12	ns
Rise Time		t _r	-	25	45	
Turn-Off Delay Time		t _{d(off)}	-	75	125	
Fall Time		t _f	-	50	85	
Turn-On Delay Time	(V _{DD} = -16 Vdc, I _D = -6.0 Adc, V _{GS} = -4.5 Vdc, R _G = 2.5 Ω)	t _{d(on)}	-	8.0	-	ns
Rise Time		t _r	-	30	-	
Turn-Off Delay Time		t _{d(off)}	-	60	-	
Fall Time		t _f	-	60	-	
Gate Charge	(V _{DS} = -16 Vdc, I _D = -6.0 Adc, V _{GS} = -4.5 Vdc) (Note 4)	Q _T	-	15	20	nC
		Q _{gs}	-	1.7	-	
		Q _{gd}	-	6.0	-	

SOURCE-DRAIN DIODE CHARACTERISTICS

Forward On-Voltage	(I _S = -3.0 Adc, V _{GS} = 0 Vdc) (Note 4) (I _S = -2.1 Adc, V _{GS} = 0 Vdc) (I _S = -3.0 Adc, V _{GS} = 0 Vdc, T _J = 125°C)	V _{SD}	-	-0.82 -0.74 -0.68	-1.2 - -	Vdc
Reverse Recovery Time	(I _S = -3.0 Adc, V _{GS} = 0 Vdc, dI _S /dt = 100 A/µs) (Note 4)	t _{rr}	-	42	-	ns
		t _a	-	17	-	
		t _b	-	25	-	
Reverse Recovery Stored Charge		Q _{RR}	-	0.036	-	µC

4. Pulse Test: Pulse Width ≤ 300 µs, Duty Cycle ≤ 2.0%.

5. Switching characteristics are independent of operating junction temperatures.

TYPICAL ELECTRICAL CHARACTERISTICS

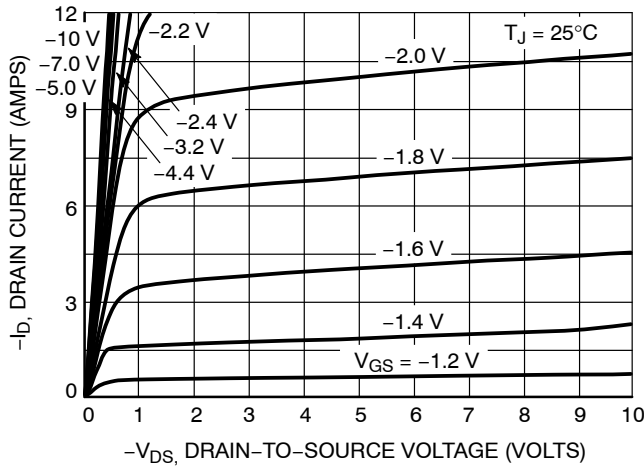


Figure 1. On-Region Characteristics

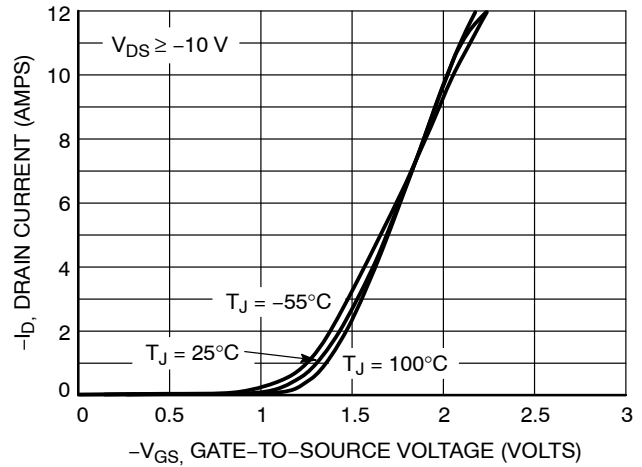


Figure 2. Transfer Characteristics

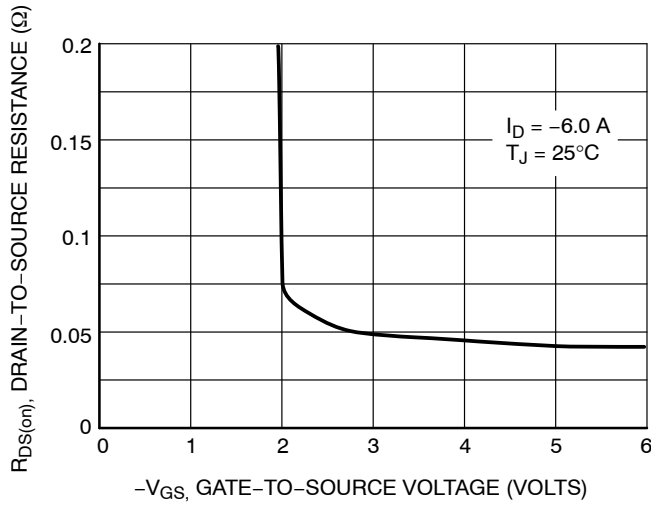


Figure 3. On-Resistance versus Gate-to-Source Voltage

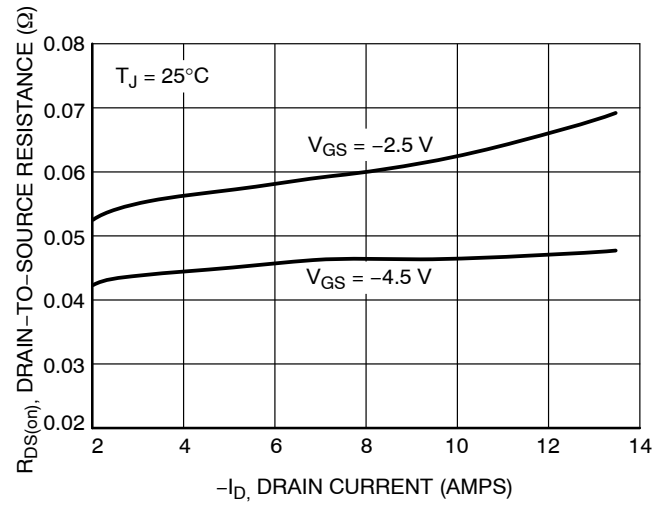


Figure 4. On-Resistance versus Drain Current and Gate Voltage

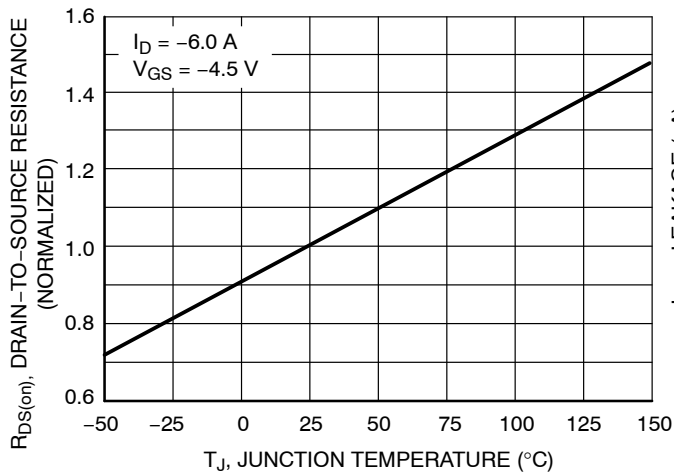


Figure 5. On-Resistance Variation with Temperature

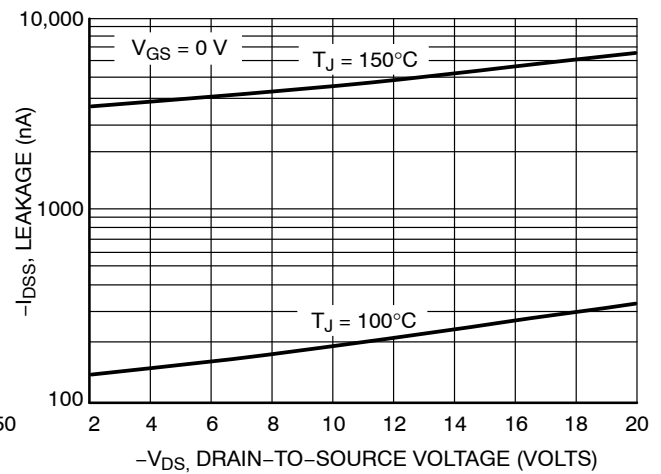


Figure 6. Drain-to-Source Leakage Current versus Voltage

TYPICAL ELECTRICAL CHARACTERISTICS

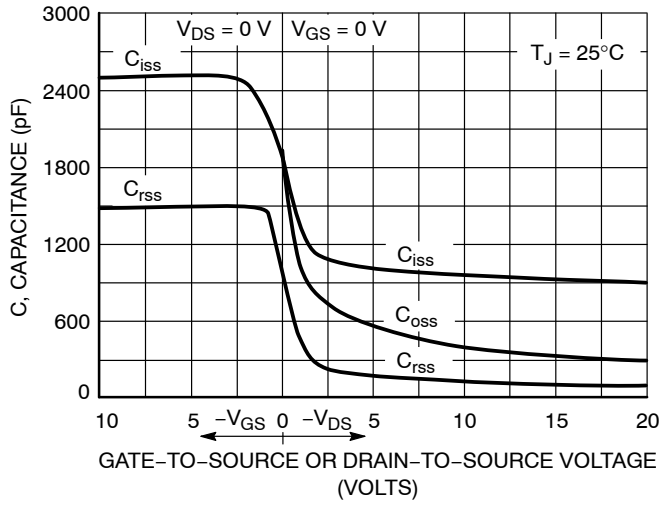


Figure 7. Capacitance Variation

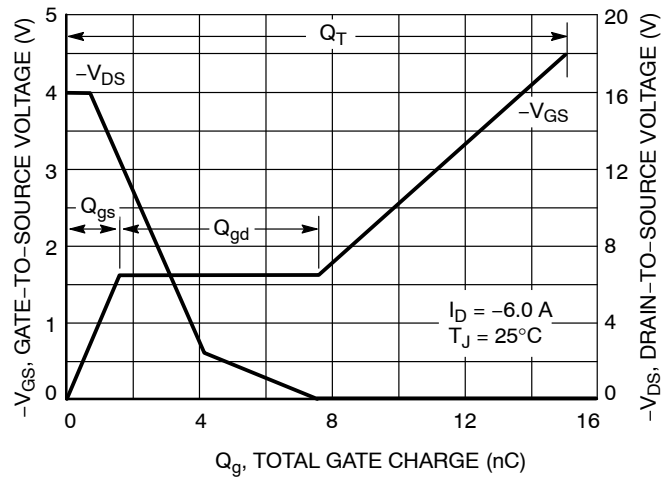


Figure 8. Gate-to-Source and Drain-to-Source Voltage versus Total Charge

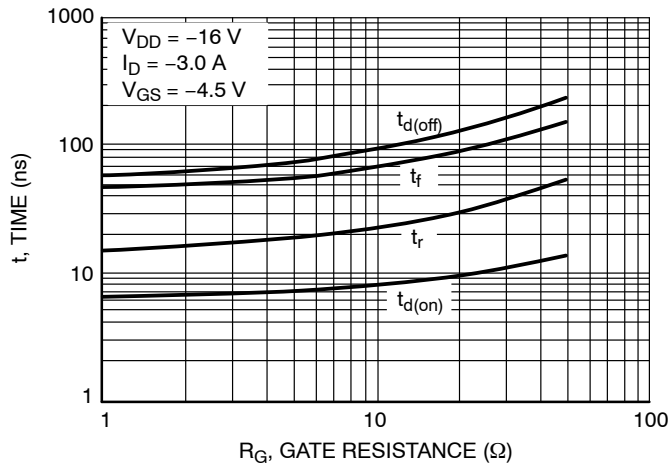


Figure 9. Resistive Switching Time Variation versus Gate Resistance

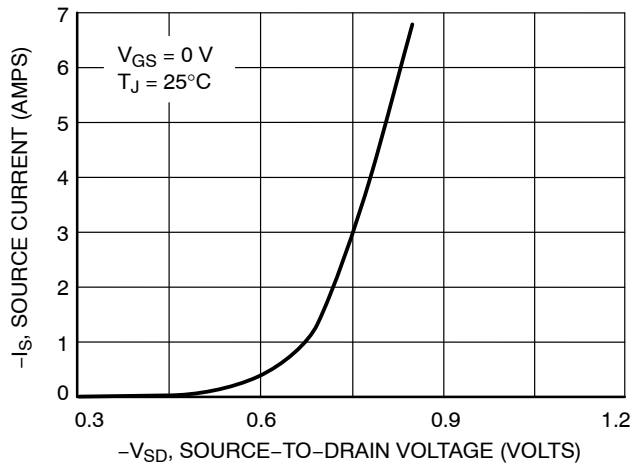


Figure 10. Diode Forward Voltage versus Current

NTF6P02, NVF6P02

TYPICAL ELECTRICAL CHARACTERISTICS

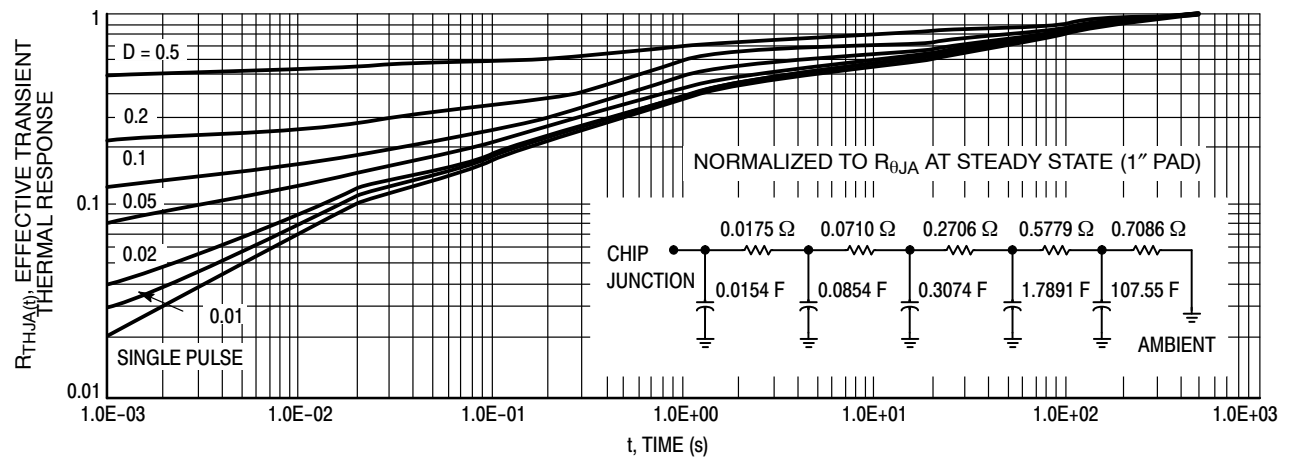





Figure 11. FET Thermal Response



SCALE 1:1

SOT-223 (TO-261)
CASE 318E-04
ISSUE R


DATE 02 OCT 2018

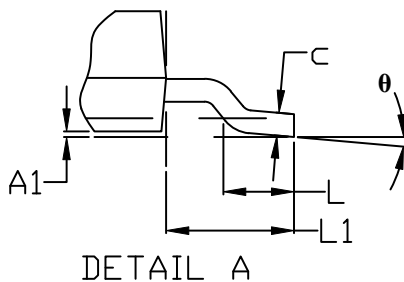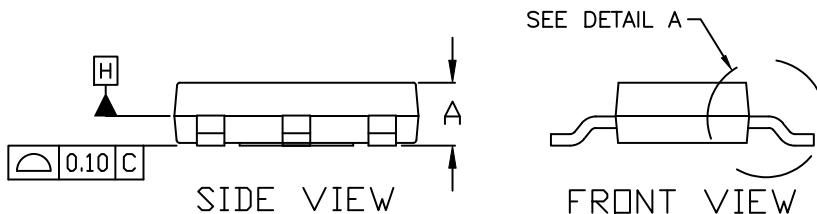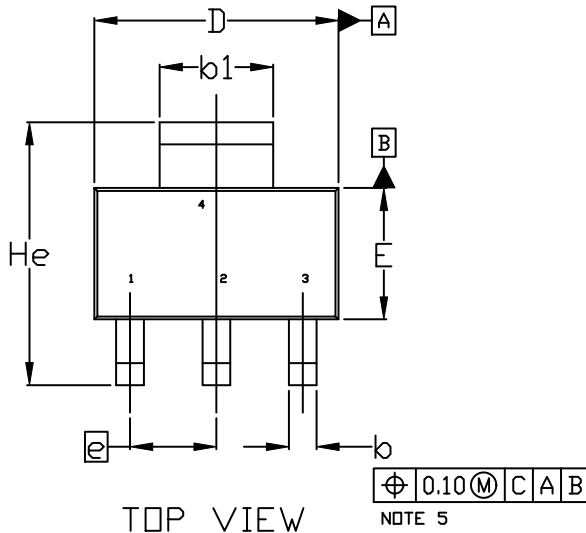

NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS
3. DIMENSIONS D & E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH, PROTRUSIONS OR GATE BURRS SHALL NOT EXCEED 0.200MM PER SIDE.
4. DATUMS A AND B ARE DETERMINED AT DATUM H.
5. A1 IS DEFINED AS THE VERTICAL DISTANCE FROM THE SEATING PLANE TO THE LOWEST POINT OF THE PACKAGE BODY.
6. POSITIONAL TOLERANCE APPLIES TO DIMENSIONS b AND b1.

MILLIMETERS			
DIM	MIN.	NOM.	MAX.
A	1.50	1.63	1.75
A1	0.02	0.06	0.10
b	0.60	0.75	0.89
b1	2.90	3.06	3.20
c	0.24	0.29	0.35
D	6.30	6.50	6.70
E	3.30	3.50	3.70
e	2.30 BSC		
L	0.20	---	---
L1	1.50	1.75	2.00
He	6.70	7.00	7.30
θ	0°	---	10°

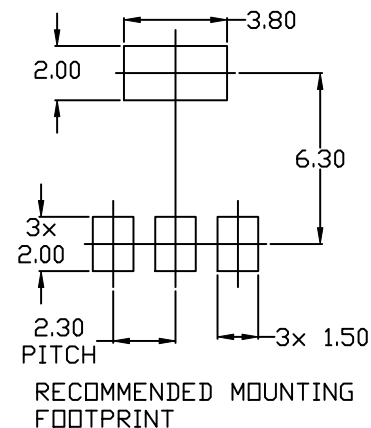

DOCUMENT NUMBER:	98ASB42680B	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.
DESCRIPTION:	SOT-223 (TO-261)	PAGE 1 OF 2

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

SOT-223 (TO-261)
CASE 318E-04
ISSUE R

DATE 02 OCT 2018

STYLE 1: PIN 1. BASE 2. COLLECTOR 3. EMITTER 4. COLLECTOR	STYLE 2: PIN 1. ANODE 2. CATHODE 3. NC 4. CATHODE	STYLE 3: PIN 1. GATE 2. DRAIN 3. SOURCE 4. DRAIN	STYLE 4: PIN 1. SOURCE 2. DRAIN 3. GATE 4. DRAIN	STYLE 5: PIN 1. DRAIN 2. GATE 3. SOURCE 4. GATE
STYLE 6: PIN 1. RETURN 2. INPUT 3. OUTPUT 4. INPUT	STYLE 7: PIN 1. ANODE 1 2. CATHODE 3. ANODE 2 4. CATHODE	STYLE 8: CANCELLED	STYLE 9: PIN 1. INPUT 2. GROUND 3. LOGIC 4. GROUND	STYLE 10: PIN 1. CATHODE 2. ANODE 3. GATE 4. ANODE
STYLE 11: PIN 1. MT 1 2. MT 2 3. GATE 4. MT 2	STYLE 12: PIN 1. INPUT 2. OUTPUT 3. NC 4. OUTPUT	STYLE 13: PIN 1. GATE 2. COLLECTOR 3. EMITTER 4. COLLECTOR		

**GENERIC
MARKING DIAGRAM***



- A = Assembly Location
- Y = Year
- W = Work Week
- XXXXX = Specific Device Code
- = Pb-Free Package

(Note: Microdot may be in either location)
 *This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "▪", may or may not be present. Some products may not follow the Generic Marking.

DOCUMENT NUMBER:	98ASB42680B	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.
DESCRIPTION:	SOT-223 (TO-261)	PAGE 2 OF 2

ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

onsemi, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Email Requests to: orderlit@onsemi.com

onsemi Website: www.onsemi.com

TECHNICAL SUPPORT

North American Technical Support:

Voice Mail: 1 800-282-9855 Toll Free USA/Canada

Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support:

Phone: 00421 33 790 2910

For additional information, please contact your local Sales Representative