


Quick Guide To Small Signal Diodes

Very Fast Switching Diodes

Features	Type No.	Package	Outline No.	Absolute Maximum Ratings/Ta=25℃			Electrical Characteristics/Ta=25℃						Remarks						
	():Marking			VR (V)	IO (mA)	IFM (mA)	IF (mA)	VF max (V)	VR (V)	IR max (μA)	IF (mA)	trr max (ns)							
General purpose	DS442X	Do-35	A-1	50	130	400	1.5	0.65	50	0.5	10	2							
	GMA01	Do-34	A-2	55	120	360	1.5	0.68	55	0.5	10	4							
	GMB01	Do-34S	A-3	55	120	360	1.5	0.68	55	0.5	10	4							
High withstand Voltage	DS446	Do-35	A-1	100	200	500	1.5	0.65	100	0.1	10	4							
	DS462	Do-35	A-1	200	200	600	1.0	0.80	200	0.5	10	60							
	GMA01U	Do-34	A-2	100	120	360	1.5	0.68	100	5	10	4							
	GMB01U	Do-34S	A-3	100	120	360	1.5	0.68	100	5	10	4							
	GMA02	Do-34	A-2	220	200	625	200	1.5	220	10	20	75							
Low leakage	DS441	Do-35	A-1	30	100	300	100	1.3	30	0.01	-	-							
Surface mounting type	DCA010(W5)	CP	C-1	80	100	300	100	1.2	80	0.5	10	4	Anode common						
	DCB010(W6)	CP	C-2										Cathode common						
	DCC010(W7)	CP	C-3										Series						
	DCD010(1W)	CP	C-3	20	100	200	10	1.0	15	0.1	-	-	Series C max=4p						
	DSA010(W1)	CP	C-4	80	100	300	100	1.2	80	0.5	10	4	Single						
	DSB010(W2)	CP	C-5																
	DSC010(W3)	CP	C-6																
	DSC015(A7)	CP	C-5	200	150	400	100	1.0	200	0.5	10	200	Single						
	DSD010(W4)	CP	C-7	80	100	300	100	1.2	80	0.5	10	4	Single						
	DSD015(A8)	CP	C-5	300	150	400	100	1.0	300	0.5	10	200	Single						
	DSE010(C)	MCP	B	80	100	225	100	1.2	80	0.5	10	4	Two terminal outline						
	DCF010(W5)	MCP	D	80	100	300							Anode common						
	DCG010(W6)	MCP	D										Cathode common						
	DCJ010(1W)	MCP	D	20	100	200	10	1.0	15	0.1	-	-	Series C max=4p						
	DCG10(PB)	PCP	G	200	1000	2000	1000	1.3	200	10.0	1000	300	Cathode common (Twin type) Anode common						
	DCH10(PC)	PCP	G																
	LFB01	LL-34	E	80	150	480	100	1.2	80	0.5	10	4	MELF(Leadless)						
	LFB01L	LL-34	E	50	150	480	100	1.2	50	0.5	10	4							
	FC901	CP-6	F	80	100	300	100	1.2	80	0.5	10	4	Anode common						
	FC902	CP-6	F										Cathode common						
FC903	CP-6	F	Separated type																

Outlines

(unit:mm)

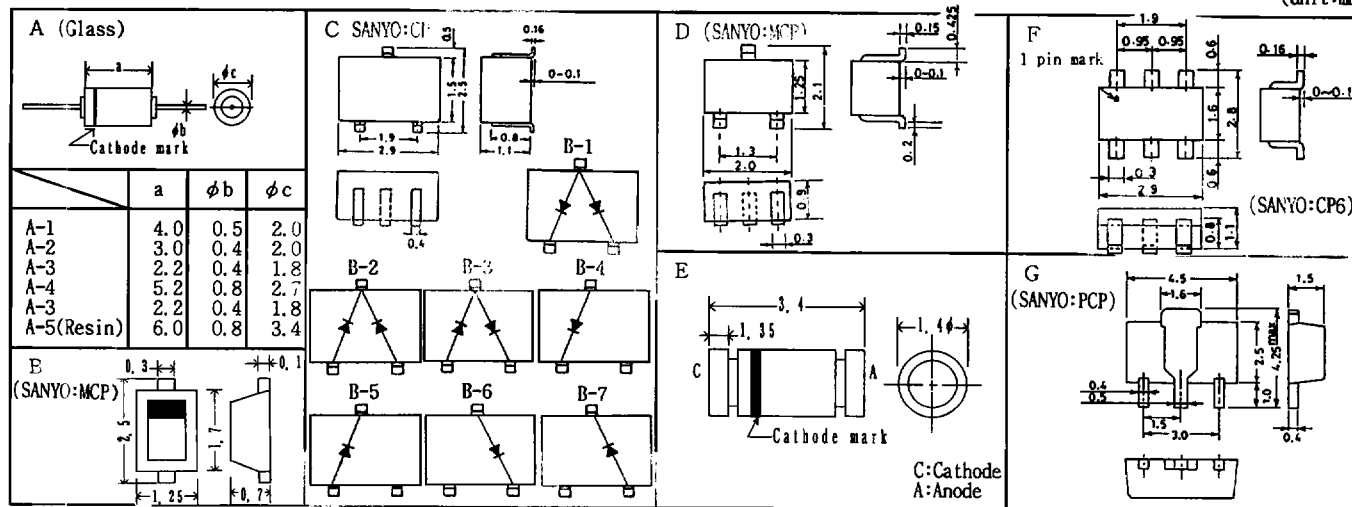

These specifications are subject to change without notice.