

# NIS5135 Series

## +5 Volt Electronic Fuse

The NIS5135 is a cost effective, resettable fuse which can greatly enhance the reliability of a hard drive or other circuit from both catastrophic and shutdown failures.

It is designed to buffer the load device from excessive input voltage which can damage sensitive circuits. It also includes an overvoltage clamp circuit that limits the output voltage during transients but does not shut the unit down, thereby allowing the load circuit to continue operation. Two thermal options are available, latching and auto-retry.

### Features

- Integrated Power Device
- Power Device Thermally Protected
- No External Current Shunt Required
- 68 m $\Omega$  Typical
- Internal Charge Pump
- Internal Undervoltage Lockout Circuit
- Internal Overvoltage Clamp
- ESD Ratings: Human Body Model (HBM); 2000 V  
Machine Model (MM); 200 V
- These are Pb-Free Devices and are RoHS Compliant

### Typical Applications

- Mother Board
- Hard Drives
- Fan Drives



**ON Semiconductor®**

<http://onsemi.com>

## 3.6 AMP, 5 VOLT ELECTRONIC FUSE



DFN10  
CASE 485C

### MARKING DIAGRAM

| Pin       | Function     |
|-----------|--------------|
|           |              |
| 1         | 35           |
| 1-5       | SOURCE       |
| 6         | NC           |
| 7         | ILIMIT       |
| 8         | Enable/Fault |
| 9         | dv/dt        |
| 10        | GND          |
| 11 (flag) | VCC          |

35 = Latching Version  
35H = Auto-Retry Version  
A = Assembly Location  
Y = Year  
W = Work Week  
▪ = Pb-Free Package

(Note: Microdot may be in either location)

### ORDERING INFORMATION

See detailed ordering and shipping information in the ordering information section on page 10 of this data sheet.

## NIS5135 Series

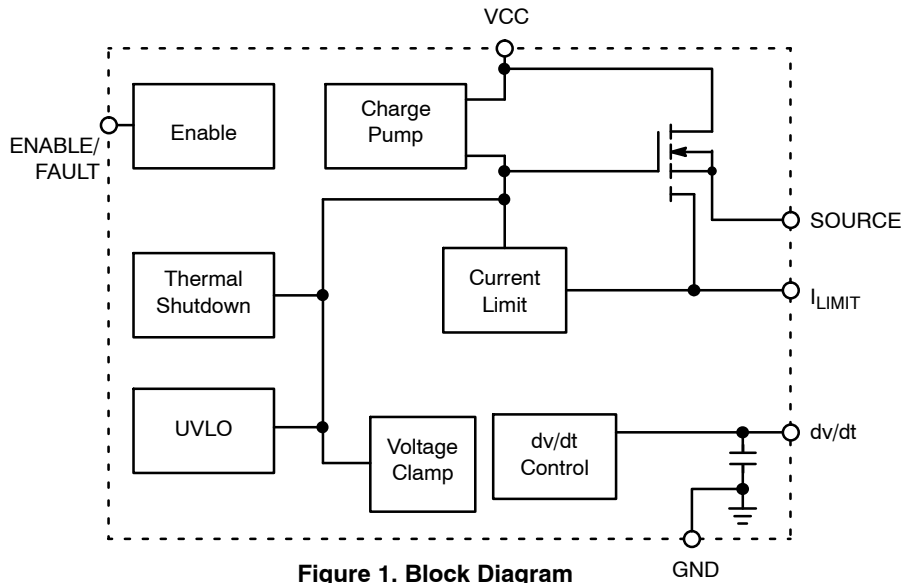


Figure 1. Block Diagram

Table 1. FUNCTIONAL PIN DESCRIPTION

| Pin            | Function     | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|----------------|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1–5            | Source       | This pin is the source of the internal power FET and the output terminal of the fuse.                                                                                                                                                                                                                                                                                                                                                                                         |
| 7              | $I_{Limit}$  | A resistor between this pin and the source pin sets the overload and short circuit current limit levels.                                                                                                                                                                                                                                                                                                                                                                      |
| 8              | Enable/Fault | The enable/fault pin is a tri-state, bidirectional interface. It can be used to enable or disable the output of the device by pulling it to ground using an open drain or open collector device. If a thermal fault occurs, the voltage on this pin will go to an intermediate state to signal a monitoring circuit that the device is in thermal shutdown. It can also be connected to another device in this family to cause a simultaneous shutdown during thermal events. |
| 9              | dv/dt        | The internal dv/dt circuit controls the slew rate of the output voltage at turn on. It has an internal capacitor that allows it to ramp up over a period of 2 ms. An external capacitor can be added to this pin to increase the ramp time. If an additional time delay is not required, this pin should be left open.                                                                                                                                                        |
| 10             | Ground       | Negative input voltage to the device. This is used as the internal reference for the IC.                                                                                                                                                                                                                                                                                                                                                                                      |
| 11 (belly pad) | $V_{CC}$     | Positive input voltage to the device.                                                                                                                                                                                                                                                                                                                                                                                                                                         |

### MAXIMUM RATINGS

| Rating                                                                                                            | Symbol        | Value                    | Unit       |
|-------------------------------------------------------------------------------------------------------------------|---------------|--------------------------|------------|
| Input Voltage, operating, steady-state ( $V_{CC}$ to GND, Note 1)<br>Transient (100 ms)                           | $V_{IN}$      | –0.6 to 18<br>–0.6 to 25 | V          |
| Thermal Resistance, Junction-to-Air<br>0.1 in <sup>2</sup> copper (Note 2)<br>0.5 in <sup>2</sup> copper (Note 2) | $\theta_{JA}$ | 227<br>95                | °C/W       |
| Thermal Resistance, Junction-to-Lead (Pin 1)                                                                      | $\theta_{JL}$ | 27                       | °C/W       |
| Thermal Resistance, Junction-to-Case                                                                              | $\theta_{JC}$ | 20                       | °C/W       |
| Total Power Dissipation @ $T_A = 25^\circ\text{C}$<br>Derate above $25^\circ\text{C}$                             | $P_{max}$     | 1.3<br>10.4              | W<br>mW/°C |
| Operating Temperature Range (Note 3)                                                                              | $T_J$         | –40 to 150               | °C         |
| Nonoperating Temperature Range                                                                                    | $T_J$         | –55 to 155               | °C         |
| Lead Temperature, Soldering (10 Sec)                                                                              | $T_L$         | 260                      | °C         |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

1. Negative voltage will not damage device provided that the power dissipation is limited to the rated allowable power for the package.
2. 1 oz copper, double-sided FR4.
3. Thermal limit is set above the maximum thermal rating. It is not recommended to operate this device at temperatures greater than the maximum ratings for extended periods of time.

## NIS5135 Series

**ELECTRICAL CHARACTERISTICS** (Unless otherwise noted:  $V_{CC} = 5.0\text{ V}$ ,  $C_L = 70\text{ }\mu\text{F}$ ,  $dv/dt$  pin open,  $R_{LIMIT} = 10\text{ }\Omega$ ,  $T_J = 25^\circ\text{C}$  unless otherwise noted.)

| Characteristics | Symbol | Min | Typ | Max | Unit |
|-----------------|--------|-----|-----|-----|------|
|-----------------|--------|-----|-----|-----|------|

### POWER FET

|                                                                                                                                 |                |    |            |     |                  |
|---------------------------------------------------------------------------------------------------------------------------------|----------------|----|------------|-----|------------------|
| Delay Time (enabling of chip to $I_D = 100\text{ mA}$ with $1\text{ A}$ resistive load)                                         | $T_{dly}$      |    | 500        |     | $\mu\text{s}$    |
| ON Resistance (Note 4)<br>$T_J = 140^\circ\text{C}$ (Note 5)                                                                    | $R_{DSon}$     | 54 | 68<br>95   | 82  | $\text{m}\Omega$ |
| Off State Output Voltage<br>( $V_{CC} = 10\text{ V}_{DC}$ , $V_{GS} = 0\text{ V}_{DC}$ , $R_L = \infty$ )                       | $V_{off}$      |    | 50         | 200 | mV               |
| Output Capacitance<br>$V_{DS} = 5\text{ V}_{DC}$ , $V_{GS} = 0\text{ V}_{DC}$ , $R_L = \infty$                                  | $C_{out}$      |    | 230        |     | pF               |
| Continuous Current ( $T_A = 25^\circ\text{C}$ , $0.5\text{ in}^2$ pad) (Note 5)<br>( $T_A = 80^\circ\text{C}$ , minimum copper) | $I_D$<br>$I_D$ |    | 3.6<br>1.7 |     | A                |

### THERMAL LATCH

|                                                                                                |            |     |     |     |                  |
|------------------------------------------------------------------------------------------------|------------|-----|-----|-----|------------------|
| Shutdown Temperature (Note 5)                                                                  | $T_{SD}$   | 150 | 175 | 200 | $^\circ\text{C}$ |
| Thermal Hysteresis (Decrease in die temperature for turn on, does not apply to latching parts) | $T_{Hyst}$ |     | 45  |     | $^\circ\text{C}$ |

### UNDER/OVERVOLTAGE PROTECTION

|                                                    |                 |      |      |      |   |
|----------------------------------------------------|-----------------|------|------|------|---|
| $V_{OUT}$ Maximum ( $V_{CC} = 10\text{ V}$ )       | $V_{out-clamp}$ | 5.95 | 6.65 | 7.35 | V |
| Undervoltage Lockout (Turn on, Voltage Going High) | $V_{UVLO}$      | 3.2  | 3.6  | 4.0  | V |
| UVLO Hysteresis                                    | $V_{Hyst}$      | –    | 0.40 | –    | V |

### CURRENT LIMIT

|                                                                               |           |     |     |     |   |
|-------------------------------------------------------------------------------|-----------|-----|-----|-----|---|
| Kelvin Short Circuit Current Limit ( $R_{Limit} = 11\text{ }\Omega$ , Note 6) | $I_{LIM}$ | 2.3 | 3.1 | 3.9 | A |
| Kelvin Overload Current Limit ( $R_{Limit} = 11\text{ }\Omega$ , Note 6)      | $I_{LIM}$ |     | 3.5 |     | A |

### dv/dt Circuit

|                                                                |            |      |     |          |    |
|----------------------------------------------------------------|------------|------|-----|----------|----|
| Output Voltage Ramp Time (Enable to $V_{OUT} = 4.7\text{ V}$ ) | $t_{slew}$ | 0.70 | 1.4 | 2.4      | ms |
| Maximum Capacitor Voltage                                      | $V_{max}$  |      |     | $V_{CC}$ | V  |

### ENABLE/FAULT

|                                                                                                                     |               |      |      |      |               |
|---------------------------------------------------------------------------------------------------------------------|---------------|------|------|------|---------------|
| Logic Level Low (Output Disabled)                                                                                   | $V_{in-low}$  | 0.35 | 0.58 | 0.81 | V             |
| Logic Level Mid (Thermal Fault, Output Disabled)                                                                    | $V_{in-mid}$  | 0.82 | 1.4  | 1.95 | V             |
| Logic Level High (Output Enabled)                                                                                   | $V_{in-high}$ | 1.96 | 2.64 | 3.30 | V             |
| High State Maximum Voltage                                                                                          | $V_{in-max}$  | 3.40 | 4.30 | 5.2  | V             |
| Logic Low Sink Current ( $V_{enable} = 0\text{ V}$ )                                                                | $I_{in-low}$  |      | –12  | –20  | $\mu\text{A}$ |
| Logic High Leakage Current for External Switch ( $V_{enable} = 3.3\text{ V}$ )                                      | $I_{in-leak}$ |      |      | 1.0  | $\mu\text{A}$ |
| Maximum Fanout for Fault Signal (Total number of chips that can be connected to this pin for simultaneous shutdown) | Fan           |      |      | 3.0  | Units         |

### TOTAL DEVICE

|                                           |            |  |     |     |    |
|-------------------------------------------|------------|--|-----|-----|----|
| Bias Current (Operational)                | $I_{Bias}$ |  | 1.5 | 2.0 | mA |
| Bias Current (Shutdown)                   | $I_{Bias}$ |  | 1.0 |     | mA |
| Minimum Operating Voltage (Notes 5 and 7) | $V_{min}$  |  |     | 3.1 | V  |

4. Pulse test: Pulse width  $300\text{ }\mu\text{s}$ , duty cycle 2%.
5. Verified by design.
6. Refer to explanation of short circuit and overload conditions in application note AND8140/D.
7. Device will shut down prior to reaching this level based on actual UVLO trip point.

## NIS5135 Series

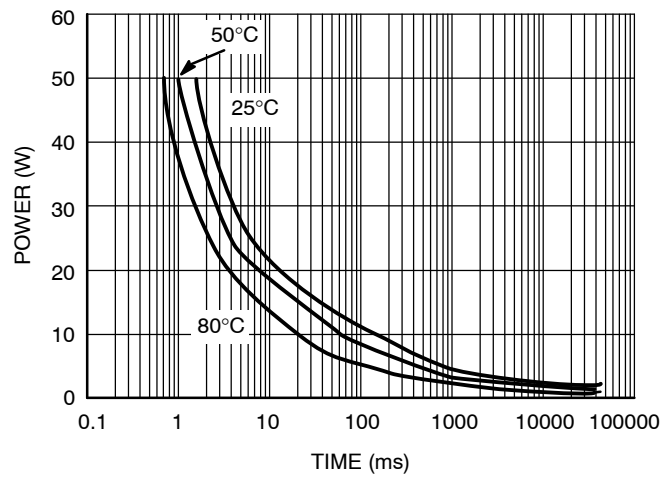


Figure 2. Power Dissipation vs. Thermal Trip Time

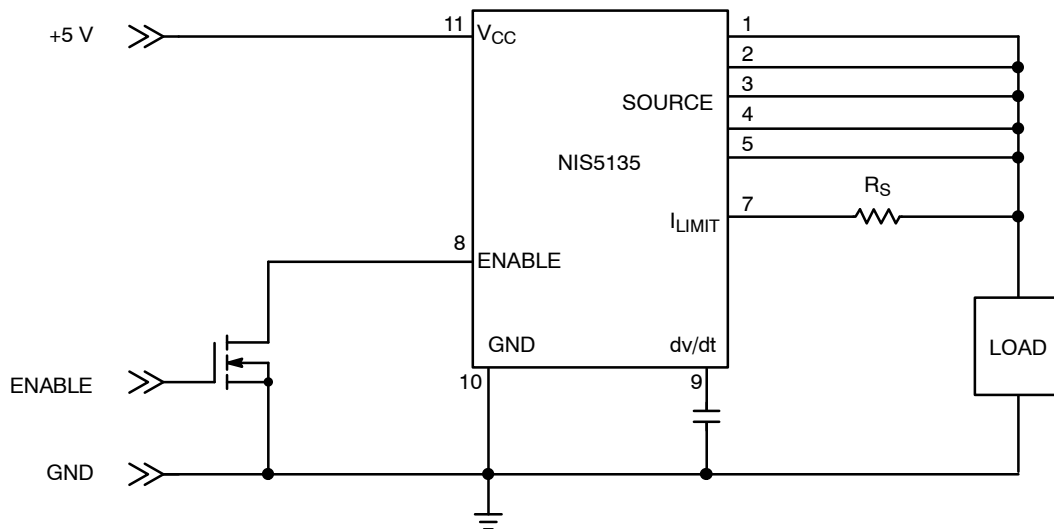


Figure 3. Application Circuit with Direct Current Sensing

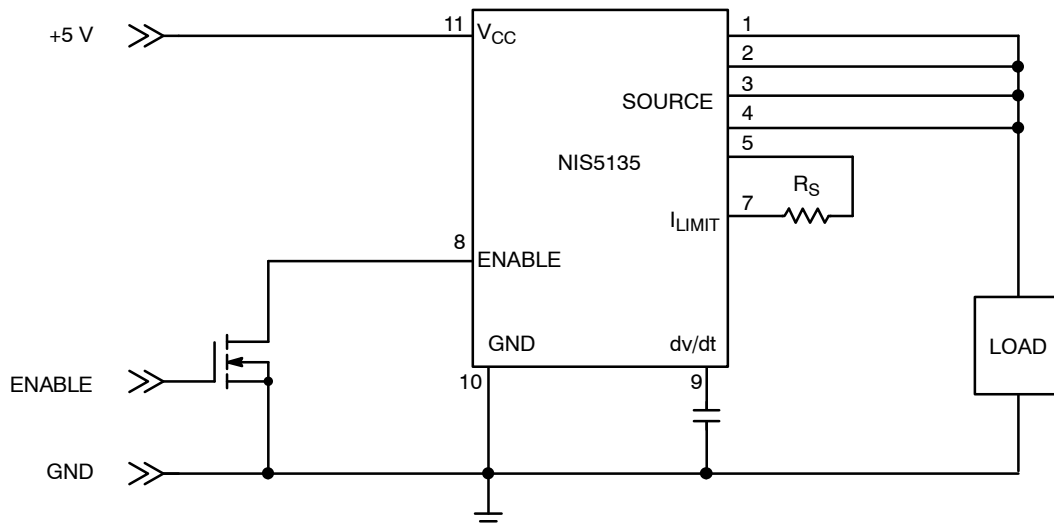


Figure 4. Application Circuit with Kelvin Current Sensing

## NIS5135 Series

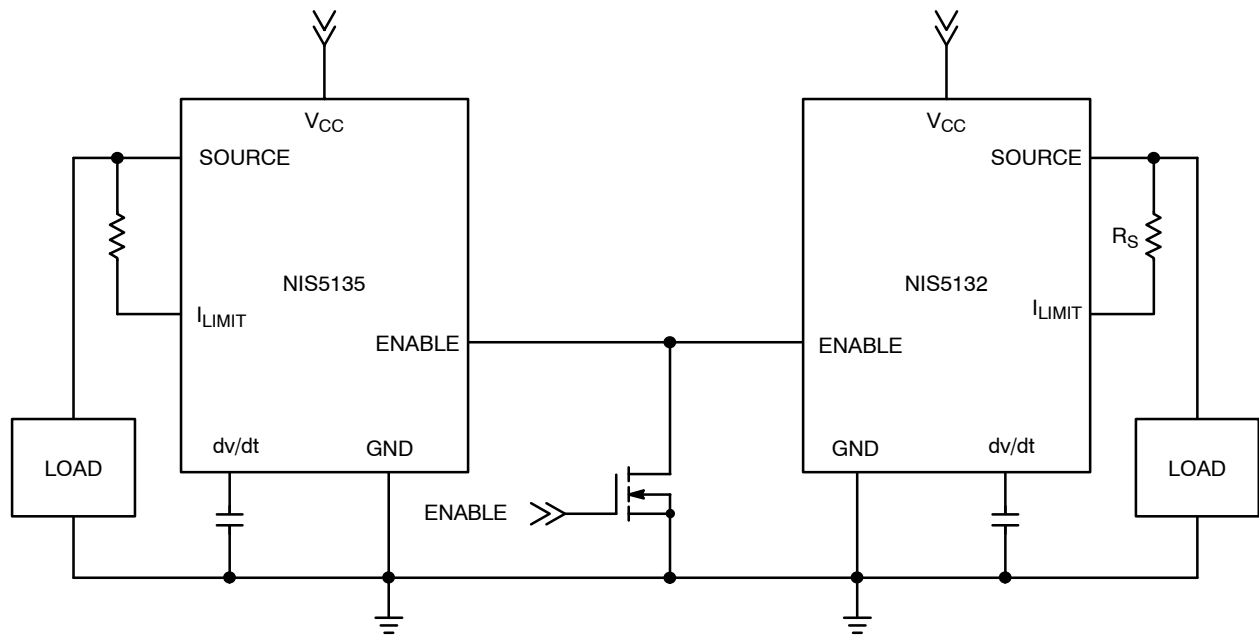


Figure 5. Common Thermal Shutdown

# NIS5135 Series

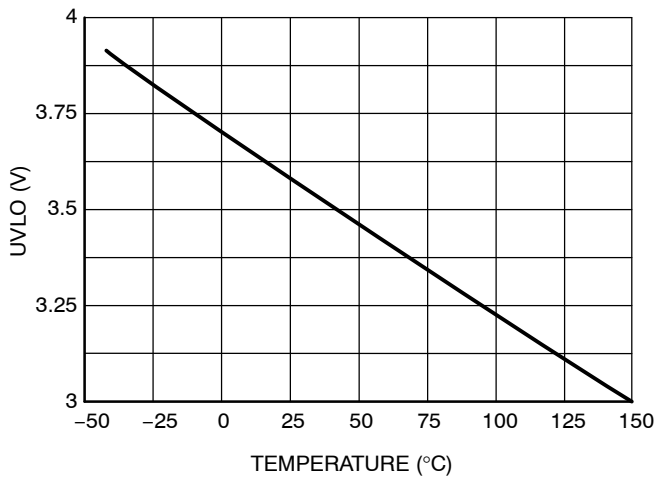


Figure 6. UVLO Turn-On

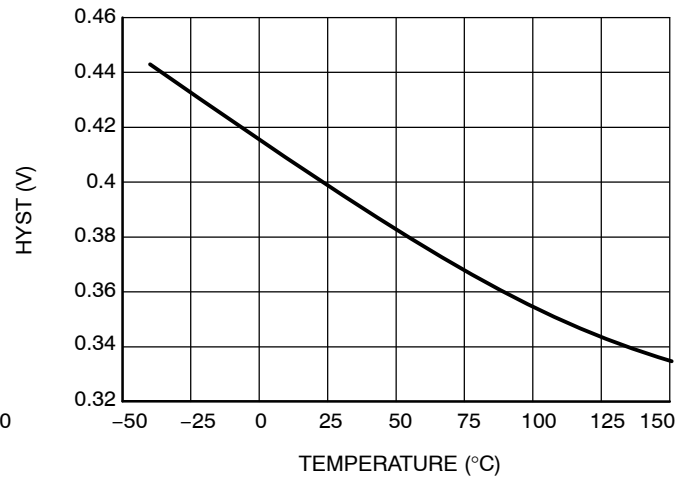


Figure 7. UVLO Hysteresis

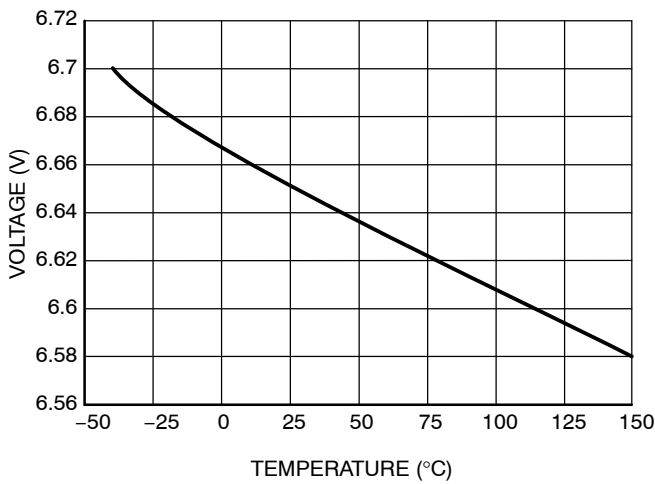


Figure 8. Output Clamping Voltage

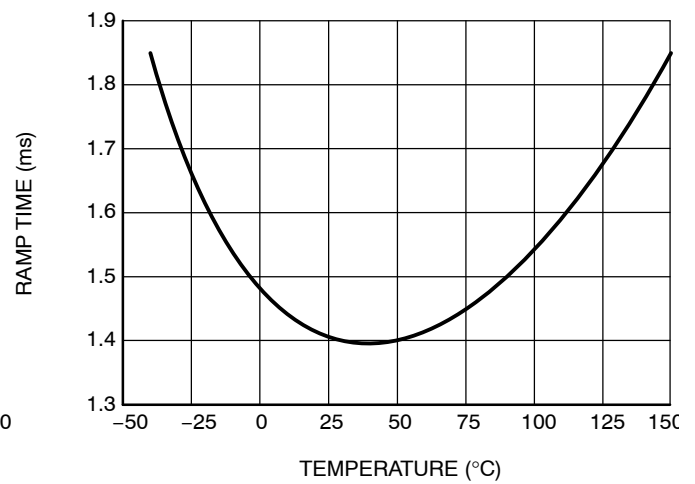


Figure 9. Output Voltage dv/dt Rate

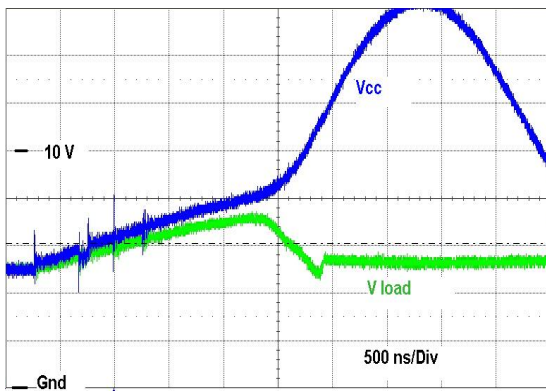


Figure 10. Input Transient Response



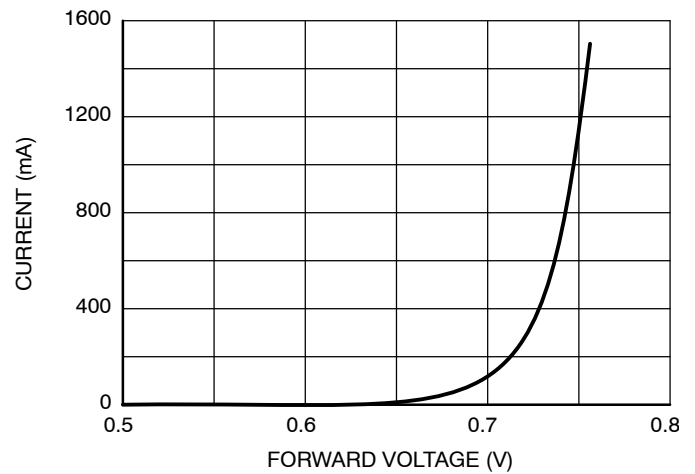


Figure 11. Body Diode Forward Characteristics


# NIS5135 Series

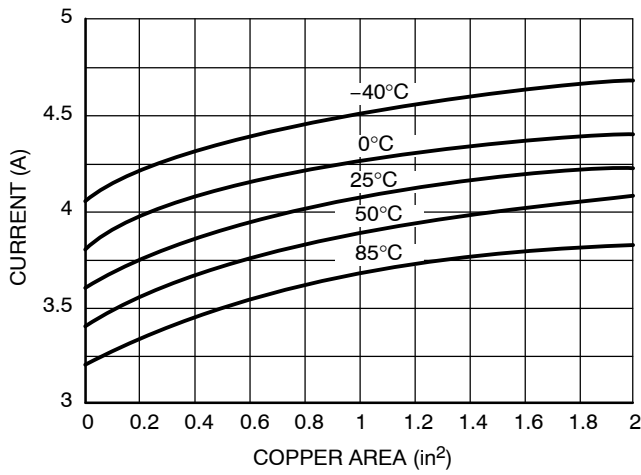


**Figure 12. Thermal Limit vs. Copper Area and Ambient Temperature**

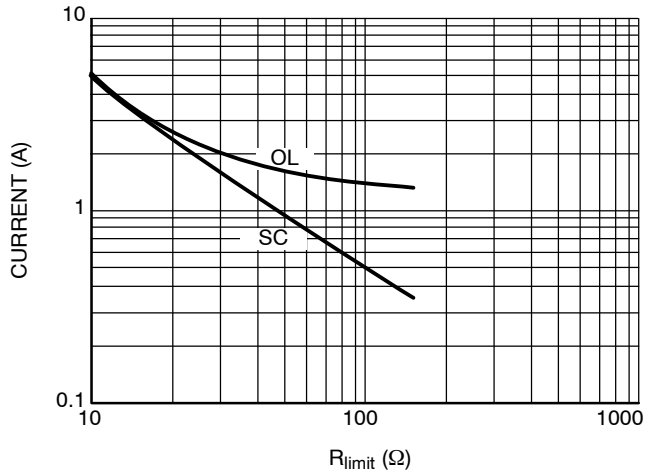


**Figure 13. Current Limit vs.  $R_{sense}$  for Direct Current Sensing**

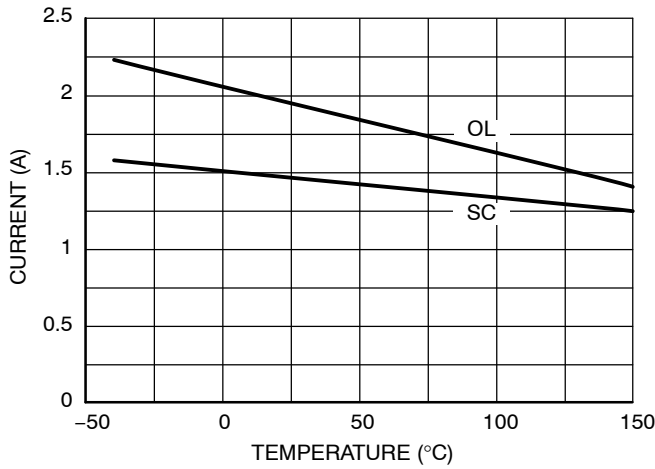


**Figure 14. Direct Current Sensing Levels vs. Temperature for 33  $\Omega$  Sense Resistor**

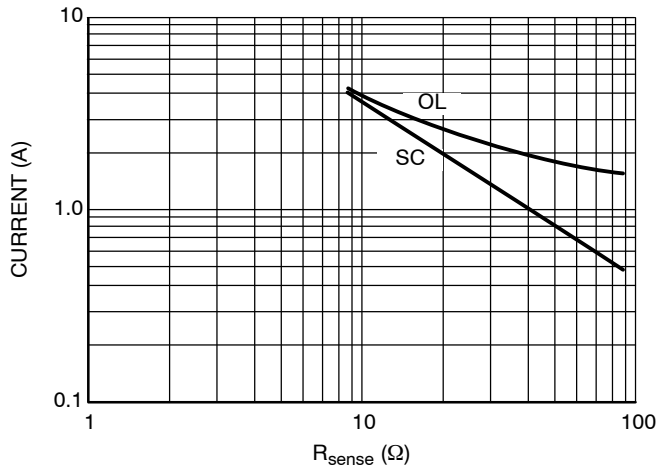

**Figure 15. Current Limit vs.  $R_{sense}$  for Kelvin Current Sensing**

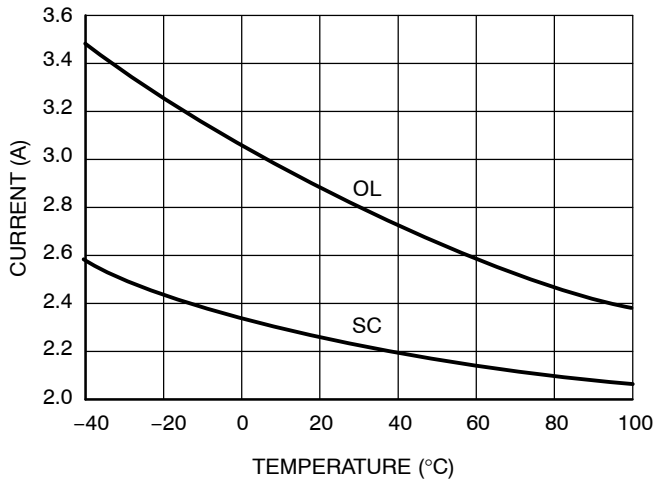

**Figure 16. Kelvin Current Sensing Levels vs. Temperature for 18  $\Omega$  Sense Resistor**

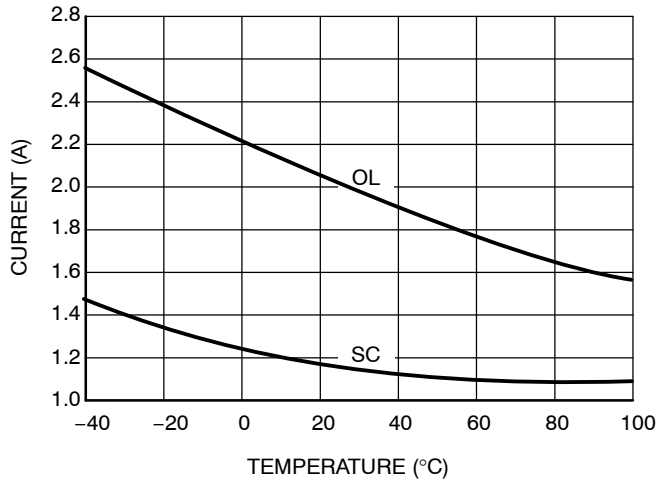

**Figure 17. Kelvin Current Sensing Levels vs. Temperature for 39  $\Omega$  Sense Resistor**

## NIS5135 Series

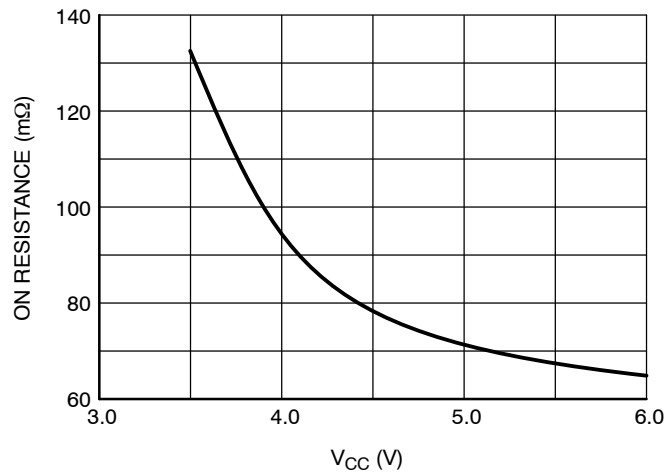


Figure 18. On Resistance vs. V<sub>CC</sub>

## APPLICATION INFORMATION

### Basic Operation

This device is a self-protected, resettable, electronic fuse. It contains circuits to monitor the input voltage, output voltage, output current and die temperature.

On application of the input voltage, the device will apply the input voltage to the load based on the restrictions of the controlling circuits. The dv/dt of the output voltage will be controlled by the internal dv/dt circuit. The output voltage will slew from 0 V to the rated output voltage in 2 ms, unless additional capacitance is added to the dv/dt pin.

The device will remain on as long as the temperature does not exceed the 175°C limit that is programmed into the chip. The current limit circuit does not shut down the part but will reduce the conductivity of the FET to maintain a constant current at the internally set current limit level. The input overvoltage clamp also does not shutdown the part, but will limit the output voltage to 6.65 V in the event that the input exceeds that level.

An internal charge pump provides bias for the gate voltage of the internal n-channel power FET and also for the current limit circuit. The remainder of the control circuitry operates between the input voltage (V<sub>CC</sub>) and ground.

### Current Limit

The current limit circuit uses a SENSEFET along with a reference and amplifier to control the peak current in the device. The SENSEFET allows for a small fraction of the load current to be measured, which has the advantage of reducing the losses in the sense resistor as well as increasing the value and decreasing the power rating of the sense resistor. Sense resistors are typically in the tens of ohms range with power ratings of several milliwatts making them very inexpensive chip resistors.

The current limit circuit has two limiting values, one for overload events which are defined as the mode of operation in which the gate is high and the FET is fully enhanced. The short circuit mode of operation occurs when the device is

actively limiting the current and the gate is at an intermediate level. For a more detailed description of this circuit please refer to application note AND8140.

There are two methods of biasing the current limit circuit for this device. They are shown in the two application figures. Direct current sensing connects the sense resistor between the current limit pin and the load. This method includes the bond wire resistance in the current limit circuit. This resistance has an impact on the current limit levels for a given resistor and may vary slightly depending on the impedance between the sense resistor and the source pins. The on resistance of the device will be slightly lower in this configuration since all five source pins are connected in parallel and therefore, the effective bond wire resistance is one fifth of the resistance for any given pin.

The other method is Kelvin sensing. This method uses one of the source pins as the connection for the current sense resistor. This connection senses the voltage on the die and therefore any bond wire resistance and external impedance on the board have no effect on the current limit levels. In this configuration the on resistance is slightly increased relative to the direct sense method since only four of the source pins are used for power.

### Overvoltage Clamp

The overvoltage clamp consists of an amplifier and reference. It monitors the output voltage and if the input voltage exceeds 6.65 V, the gate drive of the main FET is reduced to limit the output. This is intended to allow operation through transients while protecting the load. If an overvoltage condition exists for many seconds, the device may overheat due to the voltage drop across the FET combined with the load current. In this event, the thermal protection circuit would shut down the device.



### Undervoltage Lockout

The undervoltage lockout circuit uses a comparator with hysteresis to monitor the input voltage. If the input voltage drops below the specified level, the output switch will be switched to a high impedance state.

### dv/dt Circuit

The dv/dt circuit brings the output voltage up under a linear, controlled rate regardless of the load impedance characteristics. An internal ramp generator creates a linear ramp, and a control circuit forces the output voltage to follow that ramp, scaled by a factor.

The default ramp time is approximately 2 ms. This can be modified by adding an external capacitor at the dv/dt pin. This pin includes an internal current source of approximately 85 nA. Since the current level is very low, it is important to use a ceramic cap or other low leakage capacitor. Aluminum electrolytic capacitors are not recommended for this circuit.

The ramp time from 0 to the nominal output voltage can be determined by the following equation, where  $t$  is in seconds:

$$t_{0-5} = 30e6 \cdot (50 \text{ pF} + C_{\text{ext}})$$

$$C_{\text{ext}} = \frac{t_{0-5}}{30e6} - 50 \text{ pF}$$

Where:

C is in Farads

t is in Seconds

Any time that the unit shuts down due to a fault, enable shut-down, or recycling of input power, the timing capacitor will be discharged and the output voltage will ramp from 0 at turn on.

### Enable/Fault

The Enable/Fault Pin is a multi-function, bidirectional pin that can control the output of the chip as well as send information to other devices regarding the state of the chip.

When this pin is low, the output of the fuse will be turned off. When this pin is high the output of the fuse will be turned-on. If a thermal fault occurs, this pin will be pulled low to an intermediate level by an internal circuit.

To use as a simple enable pin, an open drain or open collector device should be connected to this pin. Due to its tri-state operation, it should not be connected to any type of logic with an internal pullup device.

If the chip shuts down due to the die temperature reaching its thermal limit, this pin will be pulled down to an intermediate level. This signal can be monitored by an external circuit to communicate that a thermal shutdown has occurred. If this pin is tied to another device in this family (NIS5132 or NIS5135), a thermal shutdown of one device will cause both devices to disable their outputs. Both devices will turn on once the fault is removed for the auto-retry devices.

For the latching thermal device, the outputs will be enabled after the enable pin has been pulled to ground with an external switch and then allowed to go high or after the input power has been recycled. For the auto retry devices, both devices will restart as soon as the die temperature of the device in shutdown has been reduced to the lower thermal limit. The thermal options are listed in the ordering table.

### Thermal Protection

The NIS5135 includes an internal temperature sensing circuit that senses the temperature on the die of the power FET. If the temperature reaches 175°C, the device will shut down, and remove power from the load. Output power can be restored by either recycling the input power or toggling the enable pin. Power will automatically be reapplied to the load for auto-retry devices once the die temperature has been reduced by 45°C.

The thermal limit has been set high intentionally, to increase the trip time during high power transient events. It is not recommended to operate this device above 150°C for extended periods of time.


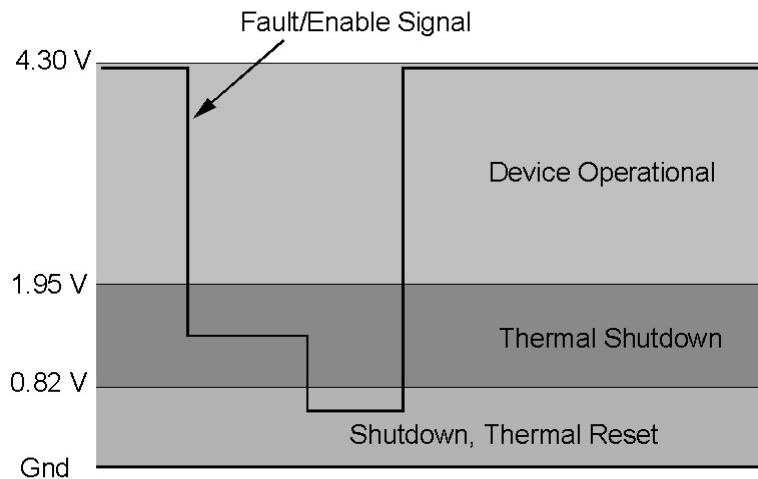


Figure 19. Enable/Fault Signal Levels

## NIS5135 Series

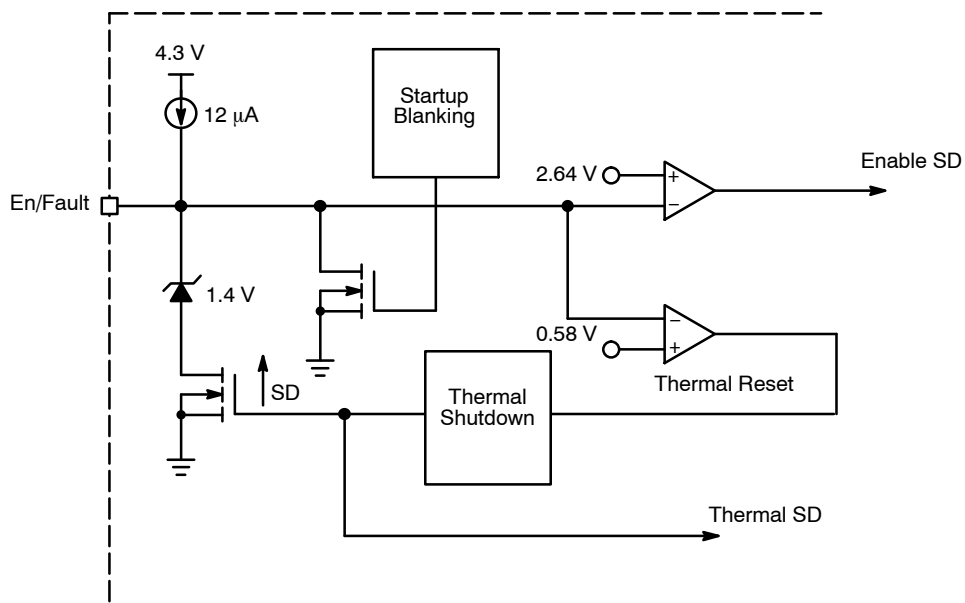

### Figure 20. Enable/Fault Simplified Circuit

## ORDERING INFORMATION

| Device        | Features           | Package            | Shipping <sup>†</sup> |
|---------------|--------------------|--------------------|-----------------------|
| NIS5135MN1TXG | Thermal Latching   | DFN10<br>(Pb-Free) | 3000 / Tape & Reel    |
| NIS5135MN2TXG | Thermal Auto-Retry | DFN10<br>(Pb-Free) | 3000 / Tape & Reel    |

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.


# MECHANICAL CASE OUTLINE PACKAGE DIMENSIONS




SCALE 2:1

## DFN10, 3x3, 0.5P CASE 485C ISSUE F


DATE 16 DEC 2021

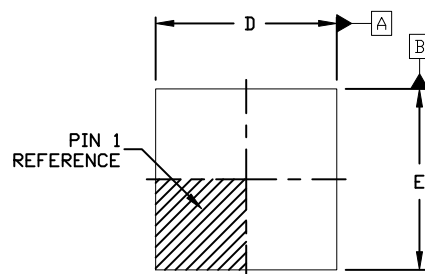

TOP VIEW

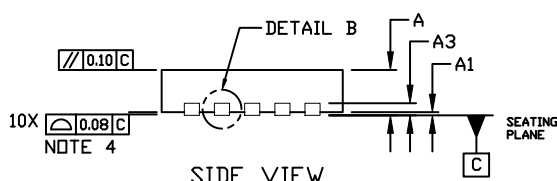


SIDE VIEW

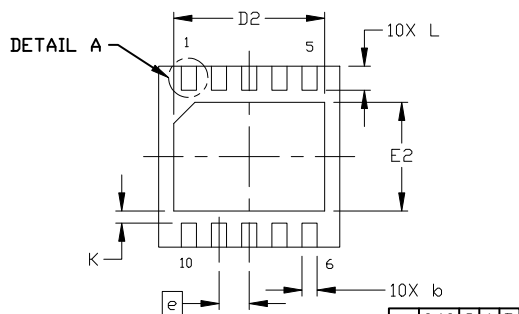

BOTTOM VIEW

### GENERIC MARKING DIAGRAM\*




XXXXX = Specific Device Code  
A = Assembly Location  
L = Wafer Lot  
Y = Year  
W = Work Week  
▪ = Pb-Free Package

(Note: Microdot may be in either location)

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "▪", may or may not be present. Some products may not follow the Generic Marking.


### NOTES:

1. DIMENSION AND TOLERANCING PER ASME Y14.5, 2009.
2. CONTROLLING DIMENSION: MILLIMETERS
3. DIMENSION  $b$  APPLIES TO PLATED TERMINAL AND IS MEASURED BETWEEN 0.15 AND 0.30 MM FROM THE TERMINAL TIP.
4. COPLANARITY APPLIES TO THE EXPOSED PAD AS WELL AS THE TERMINALS.
5. TERMINAL  $b$  MAY HAVE MOLD COMPOUND MATERIAL ALONG SIDE EDGE. MOLD FLASH MAY NOT EXCEED 30 MICRONS ONTO BOTTOM SURFACE OF TERMINAL.
6. FOR DEVICE OPN CONTAINING W OPTION, DETAIL A AND DETAIL B ALTERNATE CONSTRUCTIONS ARE NOT APPLICABLE. WETTABLE FLANK CONSTRUCTION IS DETAIL B AS SHOWN ON SIDE VIEW OF PACKAGE.

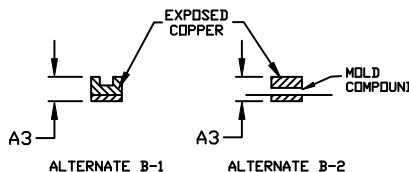


DETAIL B

ALTERNATE CONSTRUCTION




DETAIL B  
WETTABLE FLANK  
CONSTRUCTION



DETAIL A

ALTERNATE CONSTRUCTION

| DIM | MILLIMETERS |      |      |
|-----|-------------|------|------|
|     | MIN.        | NOM. | MAX. |
| A   | 0.80        | 0.90 | 1.00 |
| A1  | 0.00        | ---  | 0.05 |
| A3  | 0.20 REF    |      |      |
| b   | 0.18        | 0.23 | 0.30 |
| D   | 2.90        | 3.00 | 3.10 |
| D2  | 2.40        | 2.50 | 2.60 |
| E   | 2.90        | 3.00 | 3.10 |
| E2  | 1.70        | 1.80 | 1.90 |
| e   | 0.50 BSC    |      |      |
| K   | 0.20 REF    |      |      |
| L   | 0.30        | 0.40 | 0.50 |
| L1  | ---         | ---  | 0.03 |

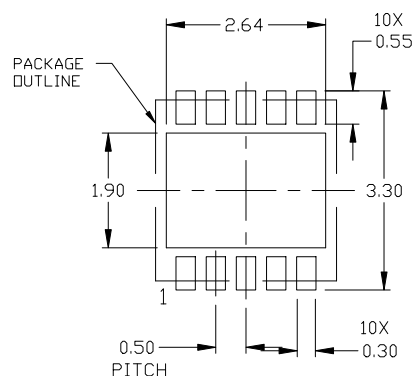

### RECOMMENDED MOUNTING FOOTPRINT

For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

|                  |                             |                                                                                                                                                                                  |
|------------------|-----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DOCUMENT NUMBER: | 98AON03161D                 | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| DESCRIPTION:     | DFN10, 3X3 MM, 0.5 MM PITCH | PAGE 1 OF 1                                                                                                                                                                      |

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Email Requests to: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**onsemi Website:** [www.onsemi.com](http://www.onsemi.com)

### TECHNICAL SUPPORT

**North American Technical Support:**

Voice Mail: 1 800-282-9855 Toll Free USA/Canada

Phone: 011 421 33 790 2910

**Europe, Middle East and Africa Technical Support:**

Phone: 00421 33 790 2910

For additional information, please contact your local Sales Representative